

User Manual

Model: HWEYE01x

Indoor Pan/Tilt Wireless IP Camera

**NIGHT VISION & REMOTE PAN / TILT ROTATE/
TWO WAY AUDIO**



CONTENTS

1 WELCOME	2
1.1 Features.....	2
1.2 Packing List	2
1.3 Product views	3
1.4 Preparations before use	4
2 SOFTWARE OPERATION	7
2.1 IP Camera Tool	7
2.2 Camera Login	10
2.3 Device Status.....	15
2.4 For Visitor	16
2.5 For Operator	17
2.6 For Administrator	20
3 How to configure settings in For Administrator	21
3.1 Alias Settings	21
3.2 Date & Time Settings.....	22
3.3 User Settings	22
3.4 Multi-Device Settings.....	23
3.5 Basic Network Settings	27
3.6 Wireless LAN Settings.....	29
3.7 ADSL Settings.....	29
3.8 UPnP Settings	30
3.9 DDNS Service Settings	30
3.10 Mail Service Settings.....	30
3.11 MSN Setting.....	31
3.12 FTP Service Settings.....	33
3.13 Alarm Service Settings	35
3.14 PTZ Settings.....	39
3.15 Upgrade Device Firmware.....	40
3.16 Backup & Restore Settings	40
3.17 Restore Factory Settings.....	40
3.18 Reboot Device	41

3.19 Log	41
3.20 Back	41
4 APPENDIX	42
4.1 Frequently Asked Questions	42
4.2 Default Parameters.....	45
4.3 Specifications.....	46
5 OBTAINING TECHNICAL SUPPORT	47

1 WELCOME

IPCAM is an integrated IP Camera solution based on the TCP/IP standard. It combines a high quality digital video camera, with a powerful web server, to bring clear video to your desktop from anywhere on your local network or the Internet.

The basic function of IPCAM is to provide remote video on the IP network. High quality video images are transmitted at up to 30fps on the LAN/WAN by using MJPEG hardware compression technology.

The WEB server within IPCAM supports various internet browsers including Internet Explorer. Therefore the management and maintenance of your device is simplified, by using the network to remotely configure, start-up, and upgrade the firmware of your IPCAM. You can use IPCAM to remotely monitor your home or your office. Controlling the IPCAM and managing images is simplified by using the provided web interface across the network utilising either wired or wireless connectivity.

1.1 Features

- Powerful high-speed video protocol processor
- High Definition Color CMOS Sensor
- 300K Pixels
- IR night vision (Range: 8m)
- Pan 300 degree, tilt 120 degree
- Optimized MJPEG video compression for transmission
- Multi-level users' management and passwords definition
- Embedded Web Server for users to visit by IE
- Wi-Fi compliant with wireless standards IEEE 802.11b/g/n
- Supports IR_CUT
- Supports Dynamic IP (DDNS) and UPnP LAN and Internet (ADSL, Cable Modem)
- Motion detection activates alarm
- Supports image snapshot
- Supports multiple network protocols: HTTP/TCP/IP/UDP/STMP/DDNS/SNTP/DHCP/FTP
- Supports WEP/WPA/WPA2 encryption
- Supports Daylight Saving Time
- Supports MSN
- Supports Gmail as sender on mail service settings
- Supports audio on Firefox, Google Chrome and Safari

1.2 Packing List

Open the package and verify the contents with the following list:

- IPCAM × 1
- Wi-Fi Antennax1 (only available for wireless model)

- DC Power Supply × 1
- Quick Installation Guide ×1
- CD × 1 (Includes IPCAM user manual, IP camera tool)
- Network Cable × 1
- Mounting bracket × 1 (option)

NOTE: Please Contact us immediately if any parts are found to be missing or damaged.

1.3 Product views

1.3.1 Front View



Figure 1.1

- 1 Speaker:** Built-in speaker
- 2 LENS:** CMOS sensor with fixed focus lens
- 3 Infrared LED:** 11 IR LEDs
- 4 Microphone:** Built-in microphone
- 5 WIFI Antenna:** Wireless Antenna

1.3.2 Back View

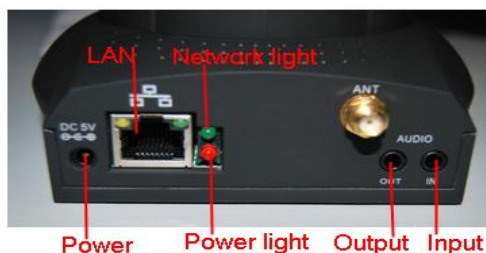


Figure 1.2

LAN: RJ-45/10-100 Base T

Power: DC 5V/2A Power supply

Network Light: The LED will blink when power and network cable are plugged in

Power Light: If the power adapter works well, the light will turn on

Audio Input: This jack is used to plug an external microphone

Audio Output: This jack is used to plug an external speaker

1.3.3 Bottom View

There are up to three labels located on the body of the camera; this is an important feature of your camera. If your camera does not have labels as shown in Figure 1.3, it may be a clone one. Cloned cameras can not use original firmware and are not eligible for warranty or technical services.



Figure 1.3

Reset button: Press and hold down the RESET BUTTON for 15 seconds. when released the IP camera will be reset back to factory default settings. You must power on the camera before reset.

1.4 Preparations before use

1.4.1 Software installation

1) Put the CD in to the CD drive of your computer. Browse the CD

2) Double click **IPCamSetup.exe** and install the software following the instructions.

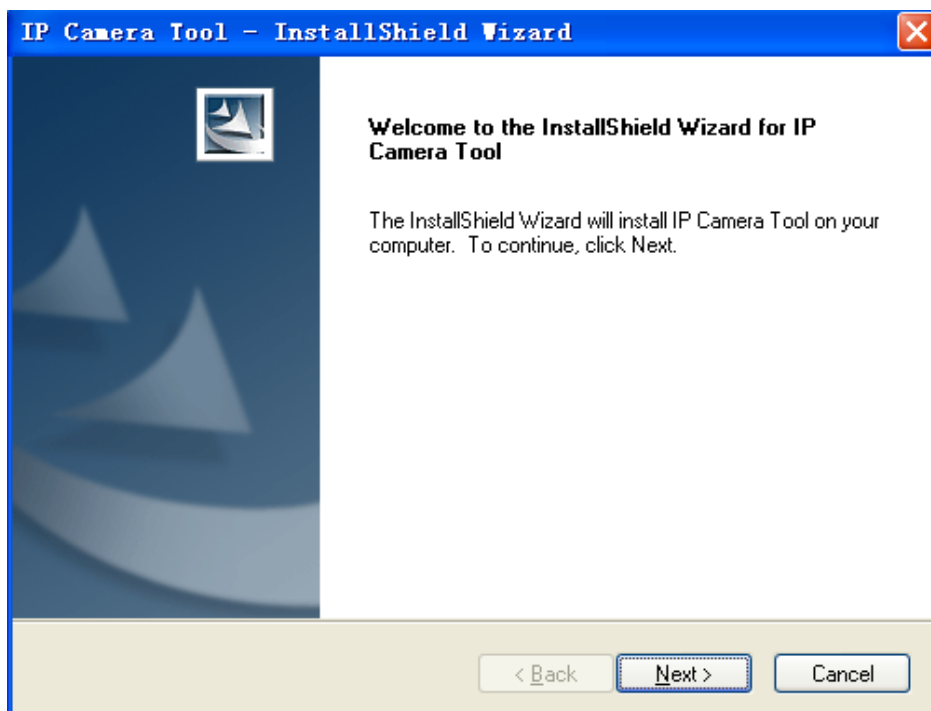


Figure 1.4

3) Click **Install** to complete the software installation.

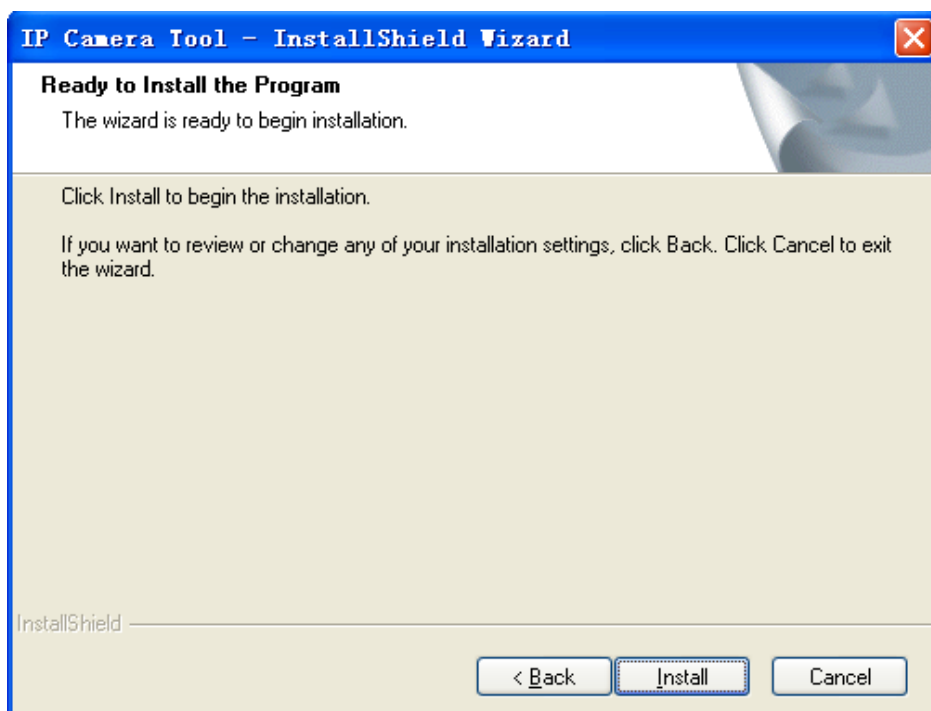


Figure 1.5

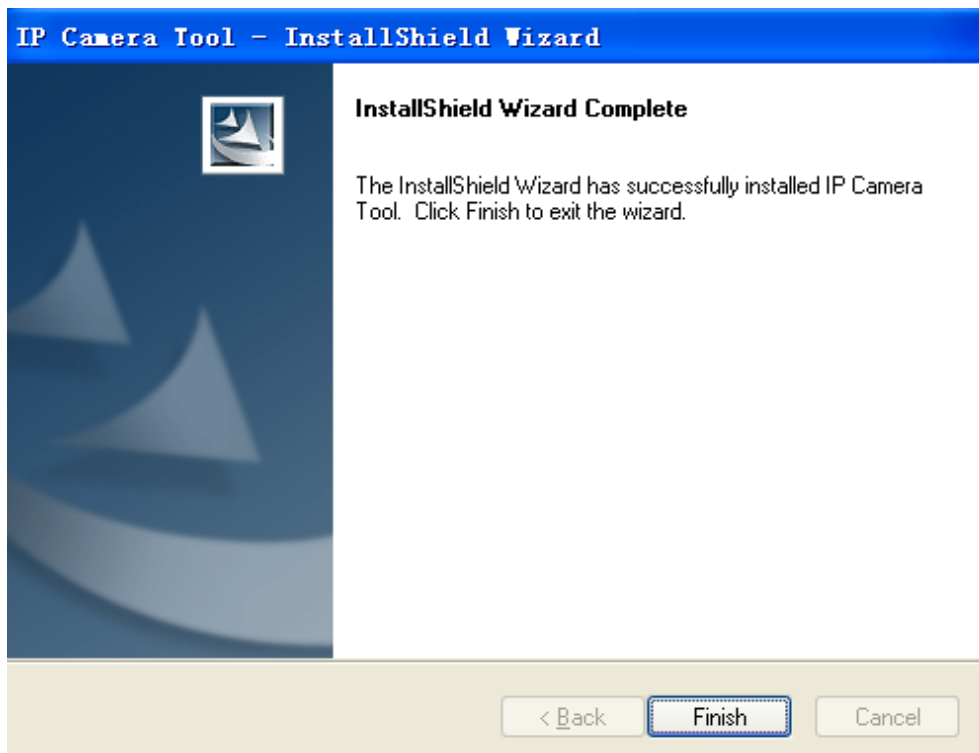



Figure 1.6



The computer restarts upon installation completion and the icon  appears on the desktop automatically.

NOTE: If you use Windows7 and could not find the icon on your desktop after installing the IP camera tool, please check that the path of the camera software is correct.

For example, if it was pointing to C:\Windows\System32\IPCamera.exe.

Please correct this by pointing the shortcut to the correct path:

C:\Windows\SysWOW64\IPCamera.exe. This shortcut should work without any problems.

CAUTION: Before installing and using the product, please read the following precautions carefully and make sure they are fully understood.

Use only the power adapter attached with the product. Using unauthorized power adapters may cause damage to your IP Camera. IP Camera terminal shall be installed in an indoor environment where the rain or snow could not pour it.

1.4.2 Hardware preparation

CAUTION: Before installing and using the camera, please read the following precautions carefully, making sure that they are fully understood and each step is carefully followed.

- 1) Adjust the antenna at the back of the camera.
- 2) Plug the network cable into the camera and then into your Cable/DSL router.
- 3) Plug the power adapter into the camera and then into the power outlet.

CAUTION: Make sure that only the power adapter supplied with your IPCAM is used. Using


a non-approved power adapter may damage the camera.

- 4) Turn on the power, the power light on the power adapter will be visible.
- 5) When the camera is powered up, If the network cable is plugged in correctly, the small green light on the camera network socket will turn on, and the small yellow light will flash. The network light will blink, about 1~2 times per second.
- 6) The camera takes approximately 30 seconds to start up before it displays an IP address on the **IP Camera Tool** (details: [2.1](#)).

2 SOFTWARE OPERATION

2.1 IP Camera Tool

When the Device has been connected properly, you can double click the icon “IP Camera Tool”



and a dialog box as Figure 2.1 will pop up.

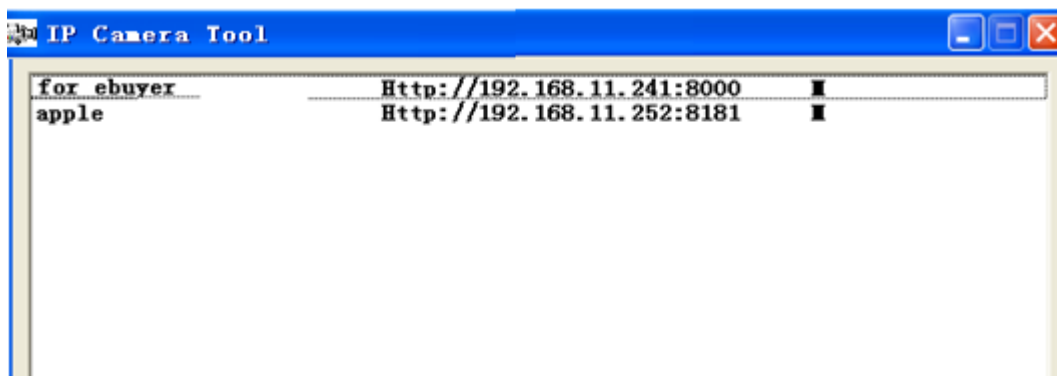


Figure 2.1

The software searches for IPCAMs automatically over the LAN.

There are 3 possible results:

1. **No Cameras are found on the LAN.** After about 1 minute of searching, the Result Field will show “not found IP Server” and the program shut off automatically.
2. **IP Cameras have been found within LAN.** All the found IP Cameras will be listed and the total number displayed in the result field as shown in Figure 2.1.
3. **IP Cameras installed within the LAN do not share the same subnet with the monitoring PC.** A prompt is displayed with a “**Subnet doesn’t match, dbclick to change!**” message. Use the left mouse button to select the prompt and then right click the mouse for available options, choose **Network Configuration** to set the IP address of the Camera to the same subnet as the LAN. (Figure 2.5) You can choose to obtain an IP from the DHCP server or set a static IP for the camera. (Figure 2.4)

NOTE: If your camera is not displayed within the IP camera tool list, check if DHCP is enabled on your router, and that the router MAC address filtering is not blocking your camera. Also make sure that any firewall isn’t blocking the camera.

Six Options

Choose the IP Camera list and right click; there are six options, Basic Properties, Network Configuration, Upgrade Firmware, Refresh Camera List, Flush Arp Buffer and About IP Camera Tool as shown Figure 2.2.

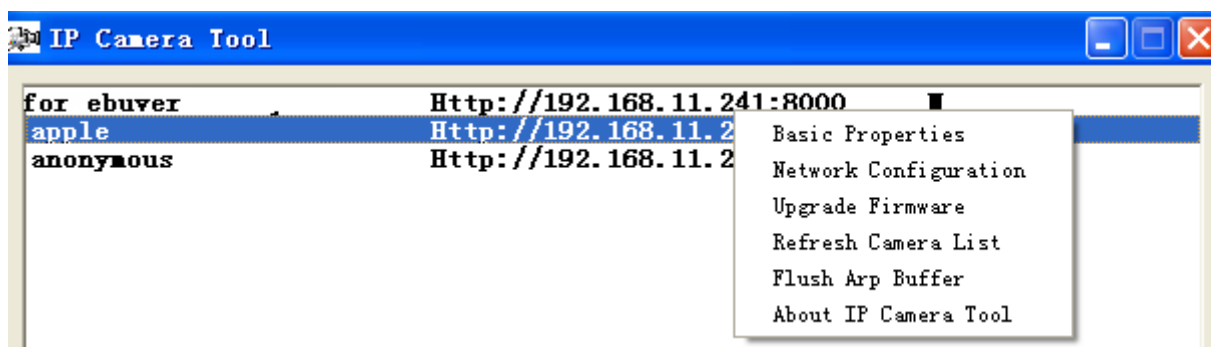


Figure 2.2

● Basic Properties

Device information displayed in the Basic Properties is **Device ID, System Firmware Version, Web UI Version**. (Figure 2.3)

If there are several cameras on the list, you can choose basic properties to check the device ID and determine the IP address allocated to each camera. For example Device ID is 00606E8C5058, the same MAC ID label is found on the bottom/back of the camera.

Each camera has its own MAC ID. If the camera's IP is not found with the IP Camera Tool, the router firewall may be blocking it. Therefore you can add this MAC ID to your router and give it a fixed IP or add the MAC ID as a trusted site. There are two MAC addresses, one is the Wired MAC ID and the other is the Wi-Fi MAC ID.

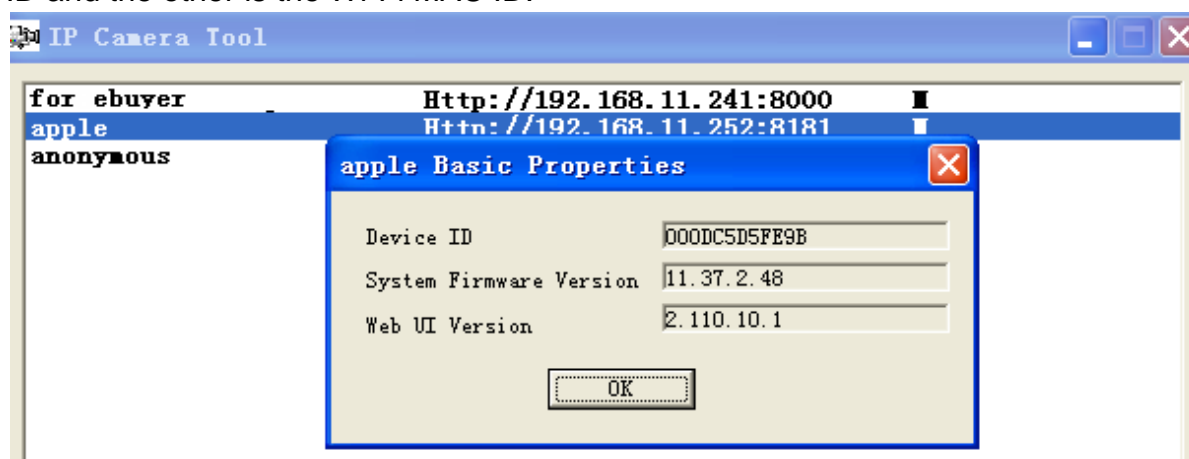


Figure 2.3

● Network Configuration

This page will allow you to configure the Network parameters.

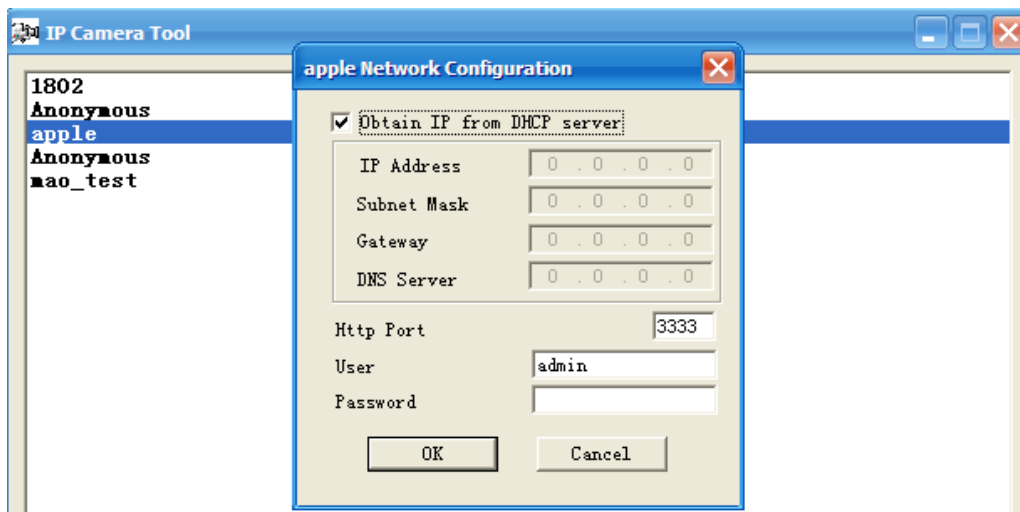


Figure 2.4

Obtain IP from DHCP server: If checked, the device will obtain its IP from the DHCP server. In other words, the camera will have a dynamic IP. (Make sure the Router to which the camera connects has DHCP enabled).

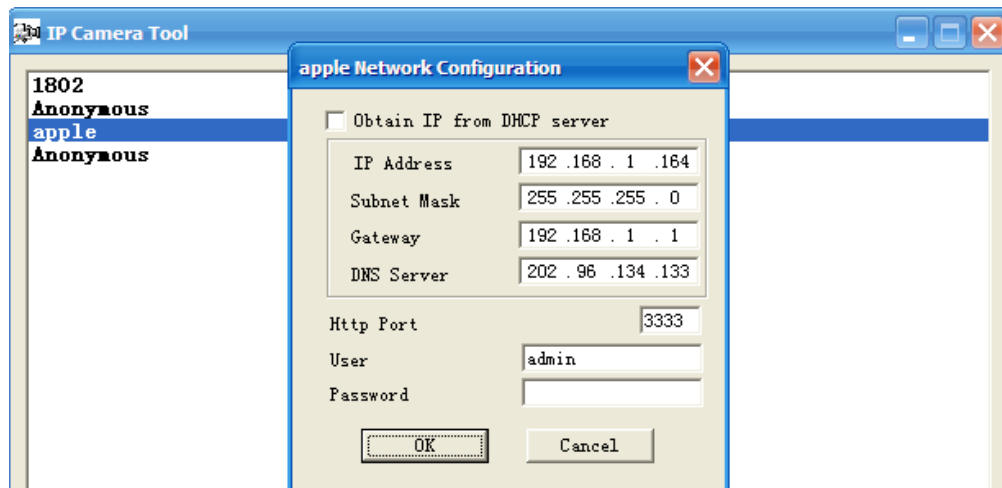


Figure 2.5

IP Address: Fill in the IP address assigned.

Subnet Mask: Fill in the Subnet Mask of your network, normally this is: 255.255.255.0. You can find the network subnet mask from your router or from your locally attached PC.

Gateway: Fill in the Gateway address. The gateway is normally your router's LAN IP. You can find the Gateway address from your locally attached PC.

DNS Server: Fill in the DNS address. It is recommended that you use the address from your locally attached PC, which is normally your router's LAN IP.

Http Port: The default port for HTTP is 80. Only change this if you understand the implications of doing so.

NOTE: If the prompt "**Subnet doesn't match, dbclick to change!**" appears, please enable DHCP and choose obtain IP from DHCP server or reconfigure the camera again.

This section only details the most typical settings and how to configure wired connections during installation. Other network configurations are broadly similar, although the specific parameters that you must configure are necessarily different. A full description of all configurations or configuring advanced IP solutions is beyond the scope of this manual.

● Upgrade Firmware

Enter the correct Username and Password to upgrade the system Firmware and Web UI. If you upgrade the camera, you must **upgrade system firmware** first and then **upgrade web UI** or you may damage the camera. Please ensure you have download the correct firmware package for your camera before upgrading. Read the upgrade documentation (readme.txt file) in the upgrade package before you upgrade.

CAUTION: If your camera works well with the current firmware, we recommend not upgrading. Please don't upgrade the firmware unnecessarily. Your camera may be damaged if misconfigured during an upgrade.

NOTE: Upon downloading the firmware check the sizes of the .bin files. They must match the size in the readme.txt file. If not, please download the firmware again until the sizes are the same. Your camera will not function correctly if a corrupt .bin file is used.

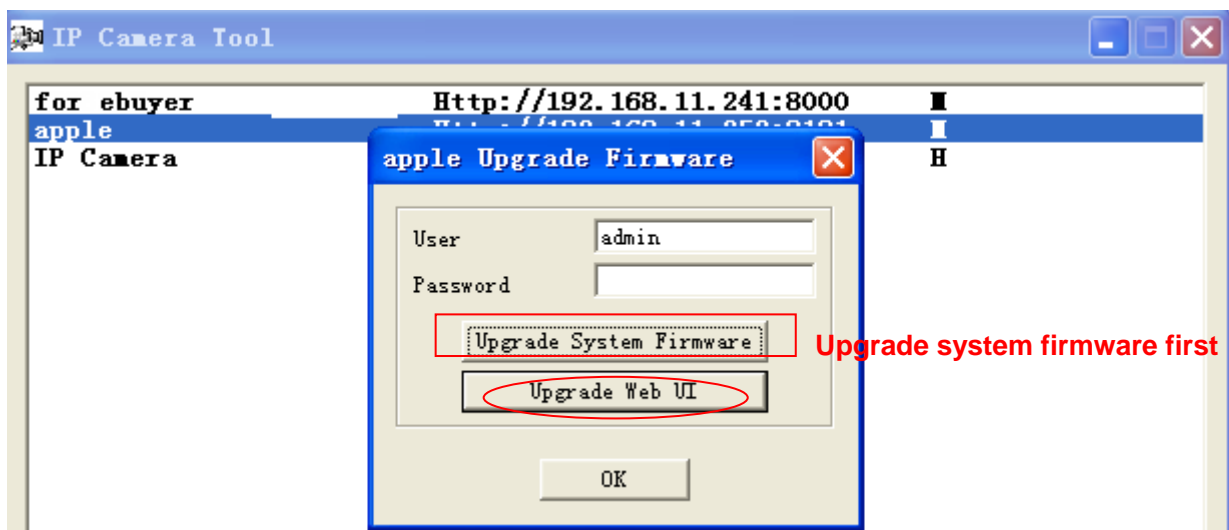


Figure 2.6

● Refresh Camera List

Refresh camera list manually.

● Flush Arp Buffer

When both wired and wireless network interfaces of the camera have a fixed IP address, You may encounter an issue with not being able to open the camera webpage. Flushing the Arp buffer may help.

● About IP Camera Tool

Displays the version of the IP Camera Tool.

2.2 Camera Login

You can access the camera through the **IP Camera Tool** or **IP Camera Tool, Internet Explorer,, Firefox, Google Chrome, Safari or other stand browser** directly.

1) Using the **IP Camera Tool** ,double click the IP address of the IP Camera listed (Figure 2.1).The browser you use will be opened automatically and display the camera login page. (Figure 2.8)

2) You can also access the camera using Internet Explorer browser by typing in the camera's IP address. For example:

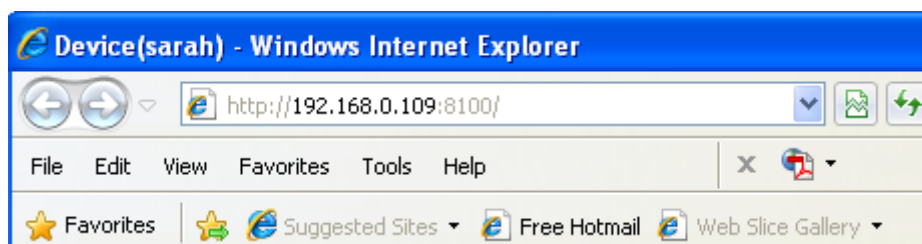


Figure 2.7



Figure 2.8

The default user is admin, with no password.

There are two modes to login. If you use IE browser, select activeX mode to login. If you use Firefox or Google Chrome, select Server Push Mode to login. (Figure 2.9)



Figure 2.9

For IE browser

Fill in the user name and choose the first login button.

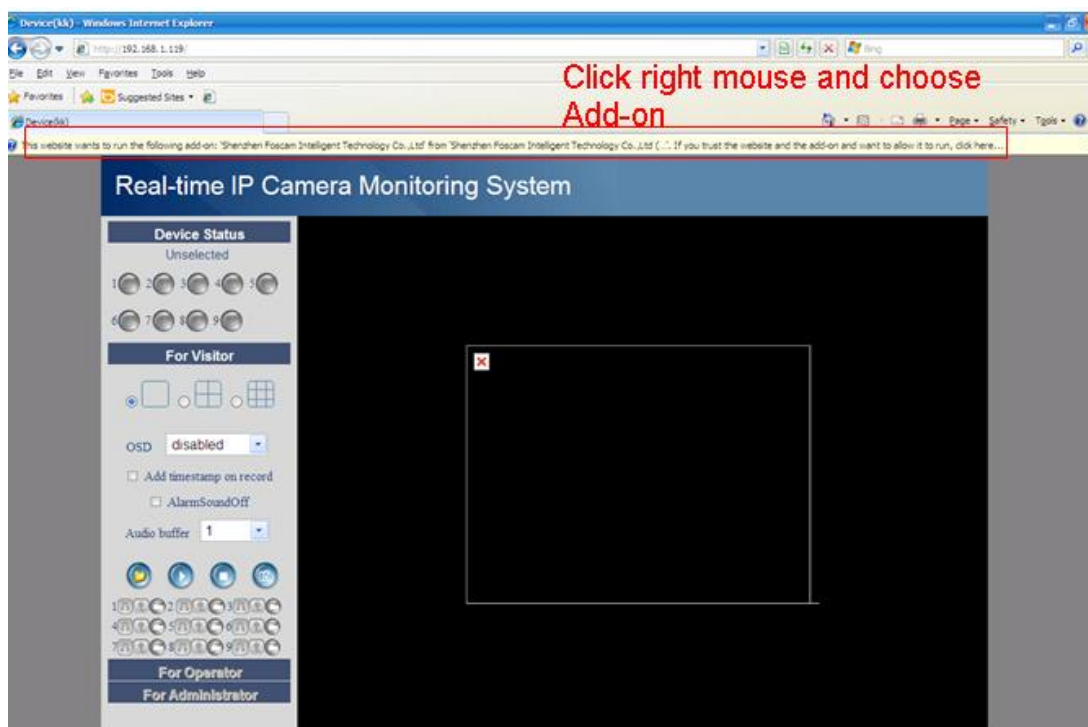


Figure 2.10

The first time you login the UI. You will receive an activeX prompt as in the picture above. (Figure 2.10) Right click on the active prompt and choose **Run Add-on**(Figure 2.11).

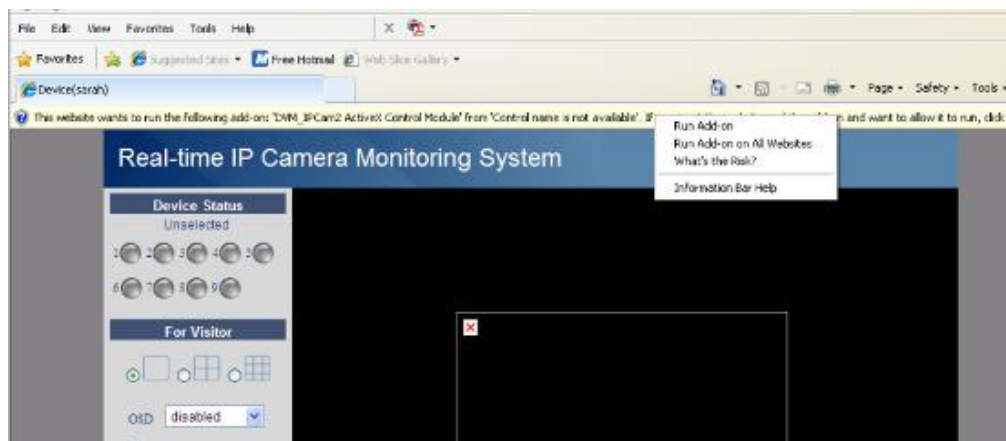


Figure 2.11

Select **Run** on the next prompt (Figure 2.12) which will return to the login screen.

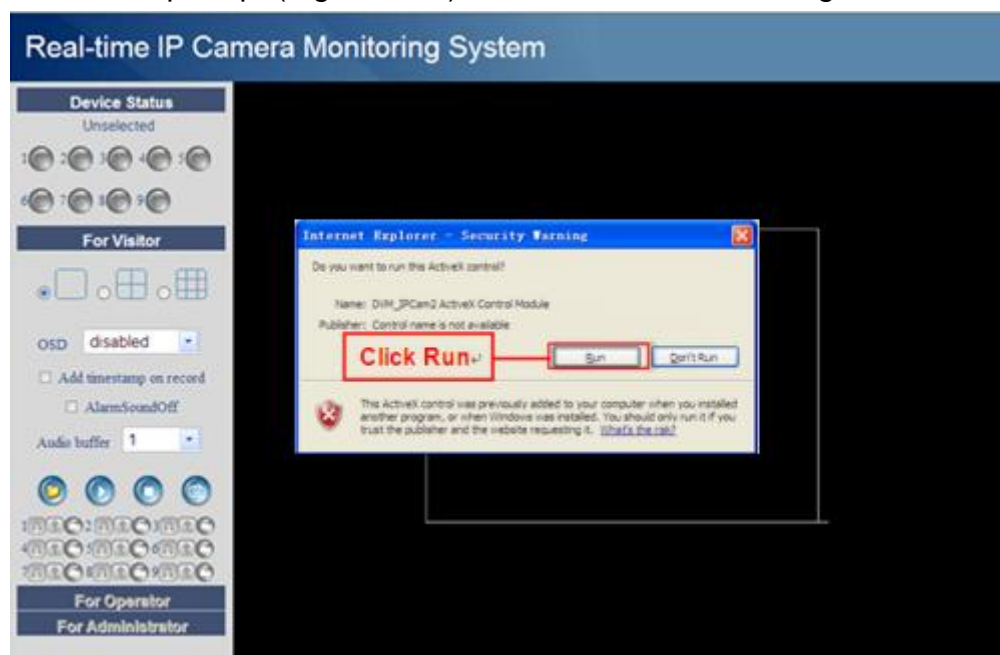



Figure 2.12

Fill in the user name and select login again. You will see a live video. (Figure 2.13)



Figure 2.13

NOTE: If you cannot see live video after installing the ActiveX control. Only a red cross  in the center of the video or just a black screen, try changing to another port number to try. Try using another port besides port 80 such as port 85, 8005 or 8100.

Make sure that all firewall or antivirus software on your computer does not block the active download and installation. If you are unable to run the ActiveX control, try shutting down the firewall or antivirus program.

For Firefox, Google Chrome, Safari or other standard browsers

Fill in the user name and choose the second login button. You may be asked for the user name and password again before you login the User Interface. After successfully logging in, you will see the **Device Status** of the camera.

Real-time IP Camera Monitoring System

Device Status
Live Video
Device Management

Device Status	
Device ID	000DC5D5FE9B
Device Firmware Version	11.37.2.48
Device Embeded Web UI Version	2.110.10.1
Alias	apple
Alarm Status	None
DDNS Status	No Action
UPnP Status	No Action
MSN Status	Succeed

Figure 2.14

Click **Live Video**, you will see the camera's live video.



Figure 2.15

2.3 Device Status

For IE browser

If the camera is connected properly the light of the device status will show green.

If the light show yellow check if the ActiveX is enabled or change another port number and try again.

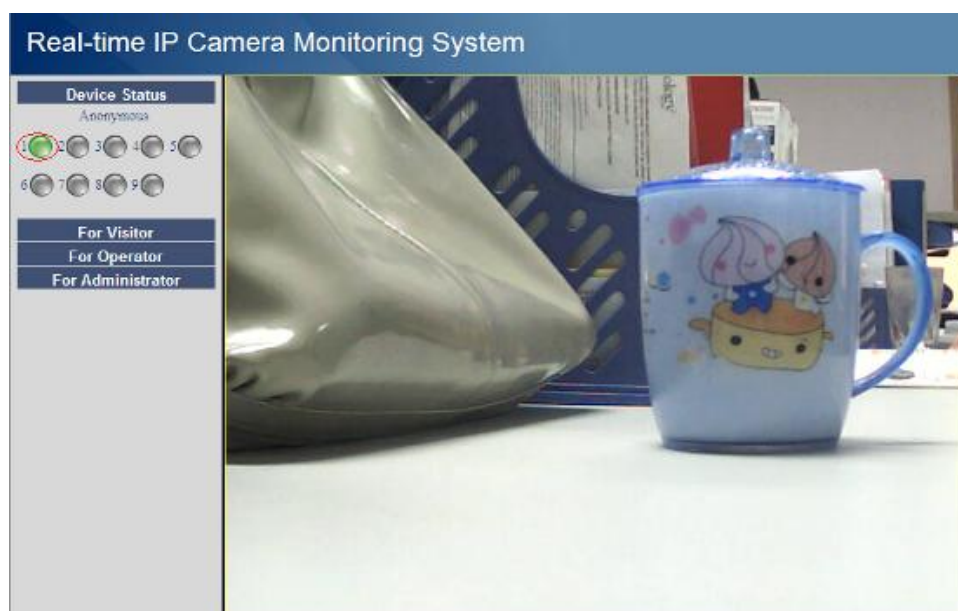


Figure 2.16

If you want to view the device information, choose **For Administrator** and then click **Device info** (Figure 2.17)

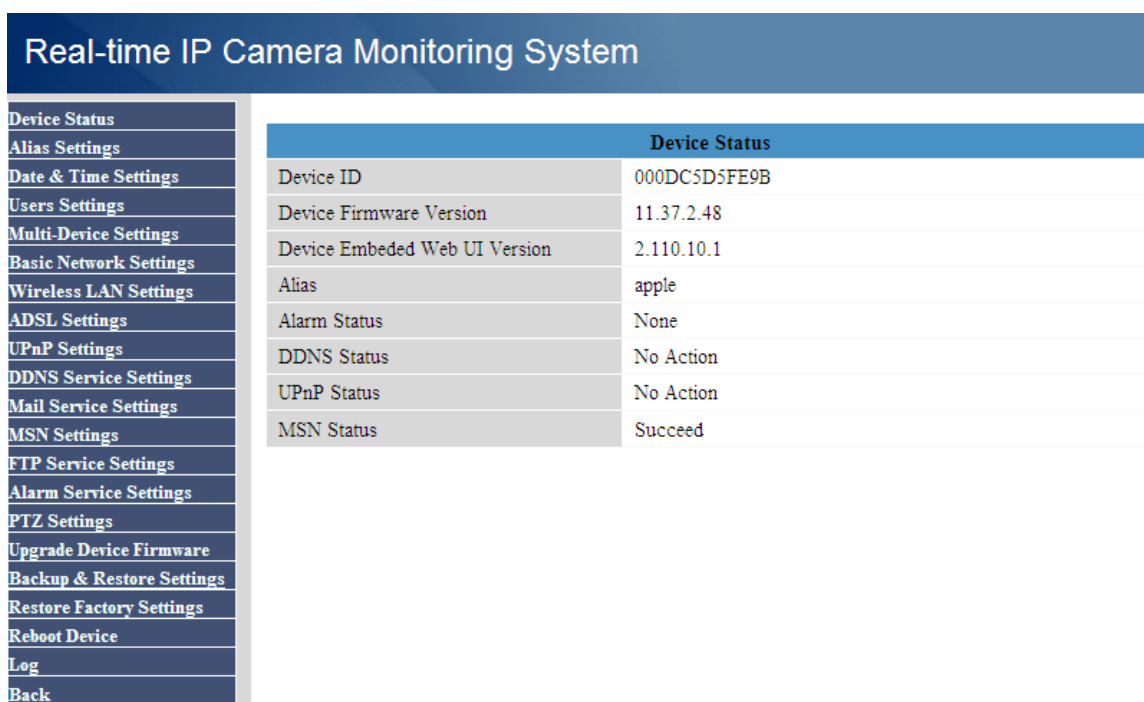


Figure 2.17

For Firefox, Google Chrome and Safari

When you login the UI, you will see **Device Status** which is the same as **Device Info** in IE browser. (Figure 2.14)

2.4 For Visitor

For IE browser

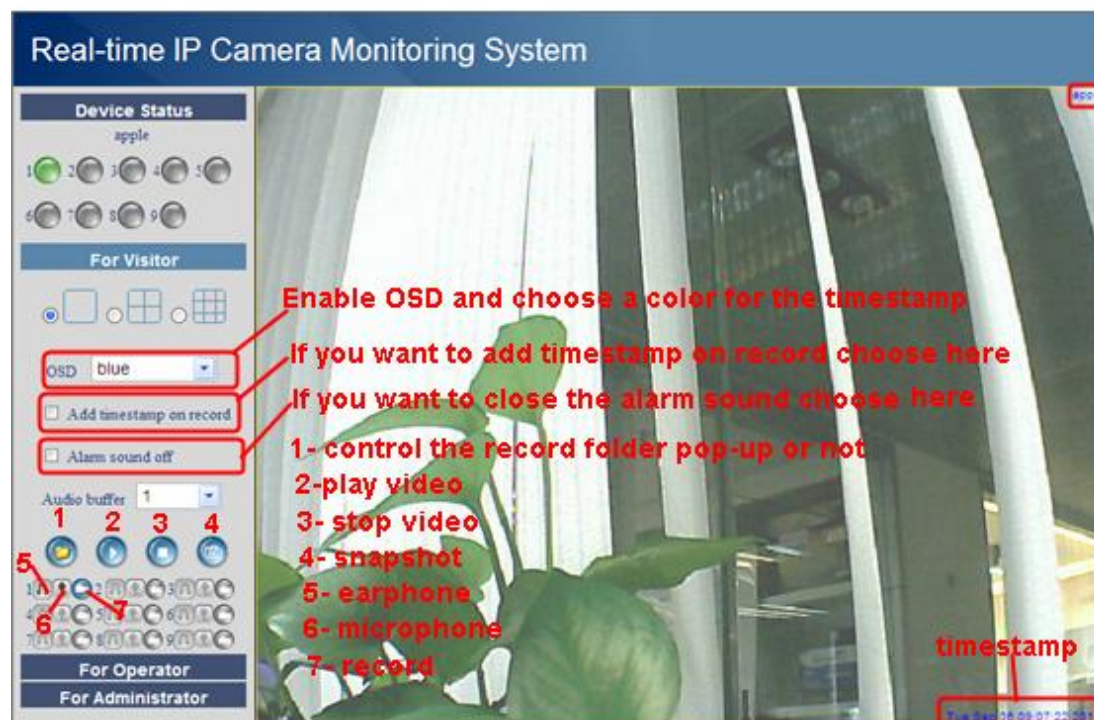


Figure 2.18

Multi-device window: The firmware inside the camera supports up to maximum of 9 cameras being monitoring at the same time. You can add other cameras in multi-device settings.

OSD: OSD is used to add timestamp on the video. There are five text colors to choose from.

Add timestamp on record: Select this option if you want to add a timestamp to recordings.

Alarm sound off: Select this option, to mute the beep alarm sound when motion is detected.

Audio buffer: Audio buffer with units set as number of seconds.



: When you enable motion alarm, the camera will record automatically and store the recording file to the folder you configured. This icon is used to control whether the folder opens or not..



: When you click this icon, the camera video will be enabled.



: When you click this icon, the camera video will be disabled.



: When you click this icon, a still image will be available to save as a JPG



: When you click this icon, the camera will begin continuous recording and store the .avi file to the folder you configured. (Figure 3.3) Click again to stop.



: Click the headphone icon and you will hear sound captured by the camera's built-in microphone. You may need to plug in earphones or enable the computer speakers to hear from the camera's microphone.



: Click the speaker icon and then talk through your computer's microphone which will transmit through the camera's speaker. People will hear your talking through the camera's built-in speaker.

Record: Click the record icon. The camera will begin recording and store the .avi file to the folder you set. (Figure 3.3) Click the record icon again to stop the recording.

For Firefox, Google Chrome and Safari

You will see the picture like Figure 2.14 when you login the camera as a visitor.

2.5 For Operator

For IE browser

Click For Operator, the following screen will appear (Figure 2.19)

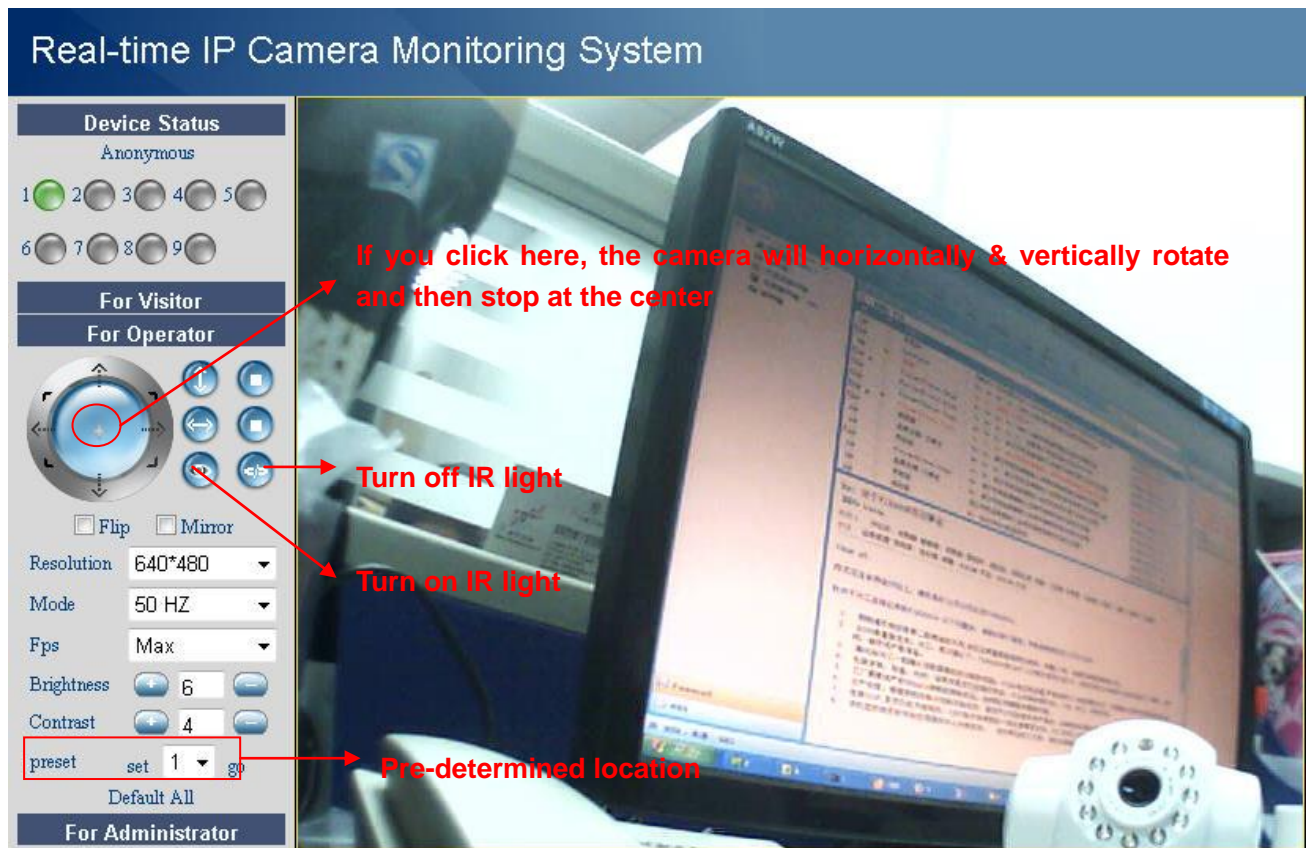


Figure 2.19

: Click this icon; camera will rotate up and down. Click to stop.

: Click this icon; camera will rotate left and right. Click to stop.

: Click this icon, all the IR lights will turn on. Click to turn off them.

Flip & Mirror: These options are primarily used if the camera is mounted inverted.

Mode: There are three modes for adjusting ambient light. (50HZ, 60HZ and outdoor)

Brightness and Contrast: are used to adjust the quality of the video.

Preset: You can create preset positions for the camera to go to directly from one position to another. A total of 8 preset positions can be configured.

Pls follow the steps below to create preset positions:

- 1 Adjust the shooting area to a desired position.
- 2 Click set 1 to define your home position.
- 3 To add additional preset positions, pls repeat step1-2.

When the camera rotates to other position, only choose the preset num you have set and click go, the camera will go to the desired position.

If you want to delete one position, only reset the position num.

For Firefox, Google Chrome and Safari

Click **Live Video**. There are several differences between IE and Firefox.

In Firefox, the snapshot button is under **For Operator**. Other functions under Live Video include: refresh video, refresh parameters, audio and close audio. (Figure 2.20a)

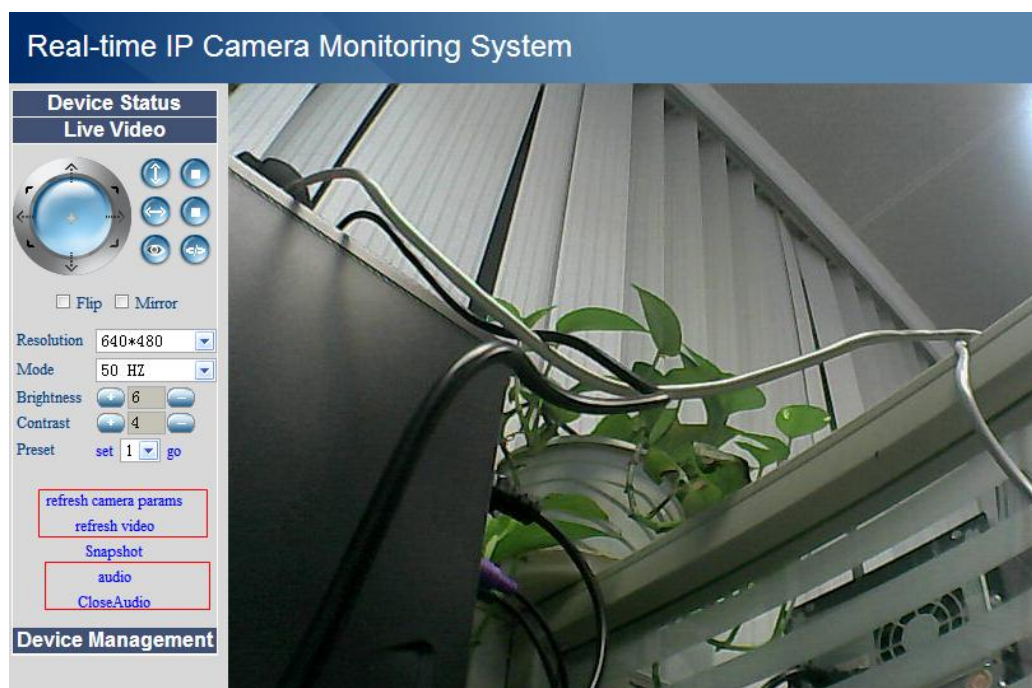


Figure 2.20a

Audio: Connect speakers or earphone or other audio output device with PC. Click “audio” and you will hear sound from the IPCAM built-in microphone.

Closeaudio: Click Close audio to turn off audio.

NOTE: You must have installed VLC before using this function. If you have not, download and install the plugin from <http://www.videolan.org> (Figure 2.20b) and install it.

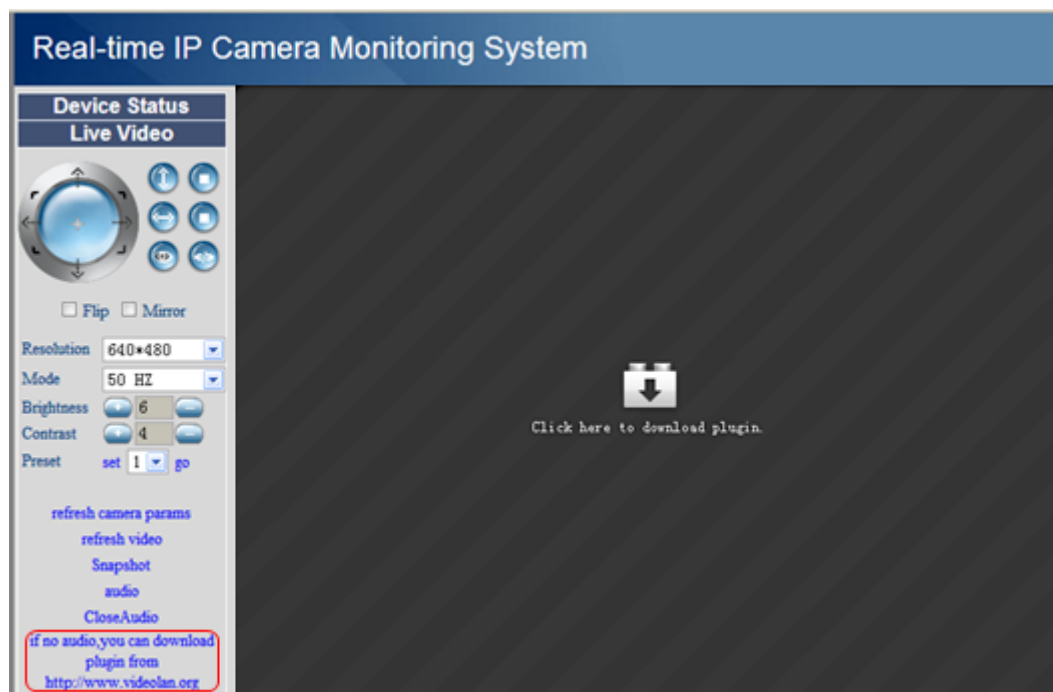


Figure 2.20b

During the installation, you must select Mozilla plugin as in Figure 2.20c.

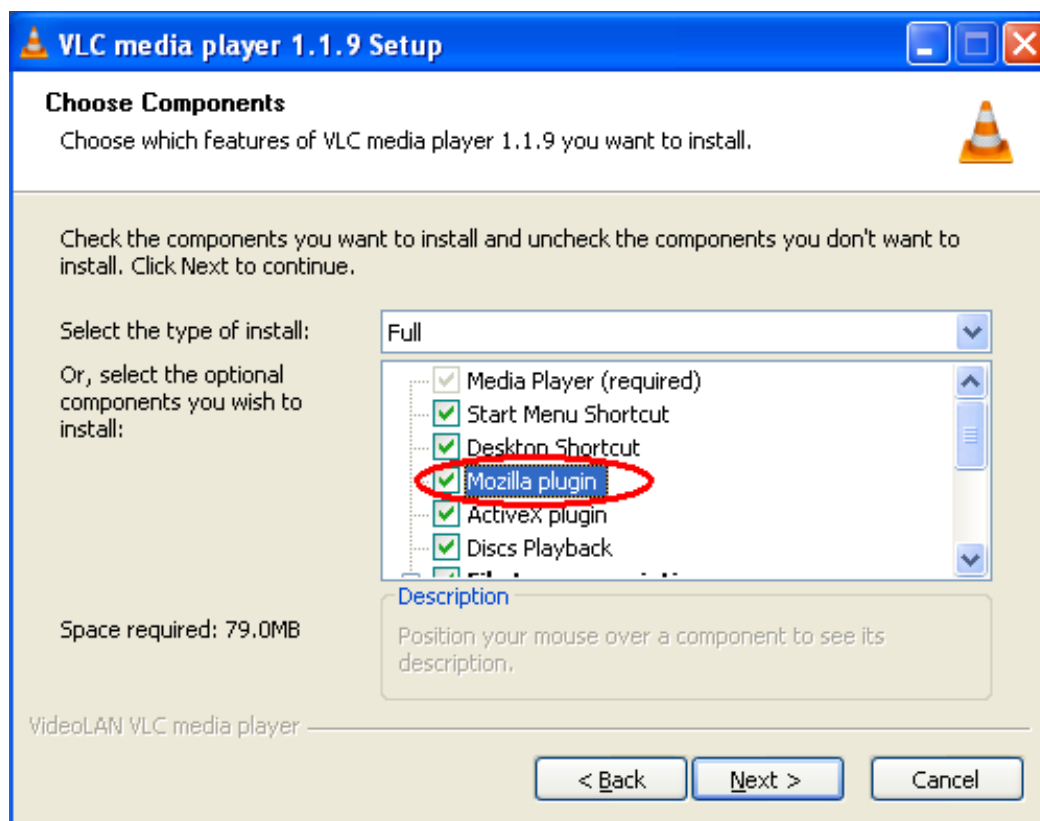


Figure 2.20c

2.6 For Administrator

For IE browser

Click **For Administrator**. You will see the **Device Status**.

It contains the device ID, firmware version of the camera and other status's of the camera.

Real-time IP Camera Monitoring System	
Device Status	
Alias Settings	
Date & Time Settings	
Users Settings	
Multi-Device Settings	
Basic Network Settings	
Wireless LAN Settings	
ADSL Settings	
UPnP Settings	
DDNS Service Settings	
Mail Service Settings	
MSN Settings	
FTP Service Settings	
Alarm Service Settings	
PTZ Settings	
Upgrade Device Firmware	
Backup & Restore Settings	
Restore Factory Settings	
Reboot Device	
Log	
Back	

Device Status	
Device ID	000DC5D5FE9B
Device Firmware Version	11.37.2.48
Device Embedded Web UI Version	2.110.10.1
Alias	apple
Alarm Status	None
DDNS Status	No Action
UPnP Status	No Action
MSN Status	Succeed

Figure 2.21

For Firefox, Google Chrome and Safari

Click **Device Management** and you will enter the settings page for administrator.

The screenshot shows the 'Real-time IP Camera Monitoring System' interface. On the left is a vertical menu with the following items: Device Status, Live Video, Device Management (highlighted), Alias Settings, Date&Time Settings, Users Settings, Basic Network Settings, Wireless Lan Settings, ADSL Settings, UPnP Settings, DDNS Service Settings, Mail Service Settings, MSN Settings, FTP Service Settings, Alarm Service Settings, PTZ Settings, Upgrade Device Firmware, Backup & Restore Settings, Restore Factory Settings, Reboot Device, and log. The main content area is titled 'Alias Settings' and contains a form with a label 'Alias' and a text input field containing 'Anonymous'. Below the input field are two buttons: 'Submit' and 'Refresh'.

Figure 2.22

We can see the difference from Figure 2.21 and Figure 2.22.

Internet Explorer has the three following options which are not the same in Firefox, Google Chrome and Safari:

Device Status: This is similar to **Device Info** which will have the same information as IE.

Multi-Device Settings: Since this function is controlled by ActiveX, it is not available in Firefox or Google Chrome.

Back: In Firefox or Google browser, you must click Live Video or Device Status to go back.

NOTE: Record and multi-device function are controlled by ActiveX controller, therefore Firefox or Google Chrome will not allow these functions.

3 How to configure settings in For Administrator

3.1 Alias Settings

Default alias is anonymous. You can define a name for your camera here such as lpcam. Click **Submit** to save your changes. The alias name supports special characters.

This screenshot shows the 'Alias Settings' form with the 'Alias' label and a text input field containing 'lpcam'. The 'Submit' and 'Refresh' buttons are visible below the input field.

Figure 3.1

3.2 Date & Time Settings

Choose the time zone of your country. You can choose **Sync with NTP Server** (Figure 3.1a) or **Sync with PC Time**. (Figure 3.2b) If your country implements the **Daylight Saving Time**, that option can also be selected (Figure 3.2c)

Date&Time Settings	
Device Clock Time	Wednesday, May 11, 2011 6:40:31 PM
Device Clock Timezone	(GMT +08:00) Beijing, Singapore, Taipei
Sync with NTP Server	<input checked="" type="checkbox"/> 1
Ntp Server	time.nist.gov 2
Sync with PC Time	<input type="checkbox"/>
Daylight Saving Time	<input type="checkbox"/>
<input checked="" type="button" value="Submit"/> 3 <input type="button" value="Refresh"/>	

Figure 3.2a

Date&Time Settings	
Device Clock Time	Wednesday, May 11, 2011 6:45:08 PM
Device Clock Timezone	(GMT +08:00) Beijing, Singapore, Taipei
Sync with NTP Server	<input type="checkbox"/> 1
Sync with PC Time	<input checked="" type="checkbox"/> 2
Daylight Saving Time	<input type="checkbox"/>
<input checked="" type="button" value="Submit"/> 3 <input type="button" value="Refresh"/>	

Figure 3.2b

Date&Time Settings	
Device Clock Time	Wednesday, May 11, 2011 7:53:48 PM
Device Clock Timezone	(GMT +08:00) Beijing, Singapore, Taipei
Sync with NTP Server	<input type="checkbox"/> 1
Sync with PC Time	<input checked="" type="checkbox"/> 2
Daylight Saving Time	<input checked="" type="checkbox"/> 3
Advance Time	60' 4
<input checked="" type="button" value="Submit"/> <input type="button" value="Refresh"/>	

The time is Wednesday, May 11, 2011 6:53:48PM before setting Daylight Saving Time

Figure 3.2c

3.3 User Settings

Here you can create users and set permission levels, **visitor**, **operator** or **administrator**. Click **Submit** to save these settings. The camera will reboot.

The screenshot displays the 'Users Settings' interface. It features a table with three columns: 'User', 'Password', and 'Group'. The 'User' column contains entries for 'admin', 'user', and 'ipcam'. The 'Password' column shows masked passwords (dots). The 'Group' column has dropdown menus with 'Administrator' selected for 'admin' and 'Visitor' for others. A red circle labeled '1' highlights the 'Administrator' dropdown. Below the table, a 'Submit' button is circled in red and labeled '2', and a 'Refresh' button is next to it. Below the table, there are two sections for setting paths. The first section, labeled '3', has a red box around it and contains 'Set Record Path' with a text field 'F:\alarm' and 'Set AlarmRecord Path' with a text field 'F:\video'. A red arrow points from the text 'Choose a path for record and alarm record' to the 'Set Record Path' field. The second section, labeled '4', has a red box around it and contains two 'Browse...' buttons.

User	Password	Group
admin	Administrator
user		Visitor
ipcam	...	Operator
		Visitor
		Visitor
		Visitor
		Visitor
		Visitor

Submit Refresh

Choose a path for record and alarm record

Set Record Path F:\alarm

Set AlarmRecord Path F:\video

Browse... Browse...

Figure 3.3

Here you can also set two important file locations for the camera, the **Record Path**, and the **Alarm Record Path**. Simply click **Browse** and choose the path to the required folder. The **Record Path** location is used to store manually recorded files (Click record icon. Figure 2.18) and still images

The **Alarm Record Path** location is used to store automatically recorded files when the camera is activated by motion. (See set motion alarm. Figure 3.30) The default path for **Record Path** and **Alarm Record Path** is C:\Documents and Settings\All Users\Documents.

NOTE: In Windows7 or Vista, if you cannot set the paths.:

Windows7 or Vista's security level is higher than Windows XP/2000. For "set record path" function, user should add the Device IP address to the Internet Explorer's 'Trusted sites' first. The step is: IE browser → Tool → Internet Proper → Security → Trusted sites → Sites → Add

3.4 Multi-Device Settings

The firmware within the camera can support a maximum of 9 devices monitoring all at the same time.

3.4.1 Add cameras in LAN

In Multi-Device Settings page, you can see all devices searched in LAN. The 1st Device is the default one. You can add more cameras in the list in LAN for monitoring. The camera's software supports up to 9 IP Cameras online simultaneously. Click **The 2nd Device** and click the item in the **Device List in LAN**, the Alias, Host and Http Port will be filled in the boxes below automatically. Enter the correct username and password then click **Add**. Add more cameras in the same way. After all cameras have been added, choose **Submit**.

Multi-Device Settings	
Device List in Lan	<div> <div>Anonymous(192.168.0.56)</div> <div>IPcam Demo(192.168.0.66)</div> <div>Anonymous(192.168.0.175)</div> <div>Anonymous(192.168.0.68)</div> </div> <div>Refresh</div>
The 1st Device	This Device
The 2nd Device	IPcam Demo(192.168.0.66)
Alias	IPcam Demo
Host	192.168.0.66
Http Port	8078
User	ipcam
Password	•••••
	<div> <div>Add</div> <div>Remove</div> </div>
The 3rd Device	None
The 4th Device	None
The 5th Device	None
The 6th Device	None
The 7th Device	None
The 8th Device	None
The 9th Device	None

1 Click it, alias, host and http port will be filled in the following boxes automatically

2 Enter user and password

3

Figure 3.4

Multi-Device Settings	
Device List in Lan	<div> <div>FI8906W-4(192.168.11.34)</div> <div>Anonymous(192.168.11.90)</div> <div>sarah(192.168.11.197)</div> <div>Anonymous(192.168.11.87)</div> </div> <div>Refresh</div>
The 1st Device	This Device
The 2nd Device	FI8906W-4(192.168.11.34)
The 3rd Device	Anonymous(192.168.11.87)
The 4th Device	Anonymous(192.168.11.90)
The 5th Device	None
The 6th Device	None
The 7th Device	None
The 8th Device	None
The 9th Device	None

Attention: If you want to access the device from internet, be sure the host and port that you set can be accessed from internet.

Click submit after you add all the cameras

Figure 3.5

Choose **For Visitor** and then click the four windows option. You will see all four cameras you added.

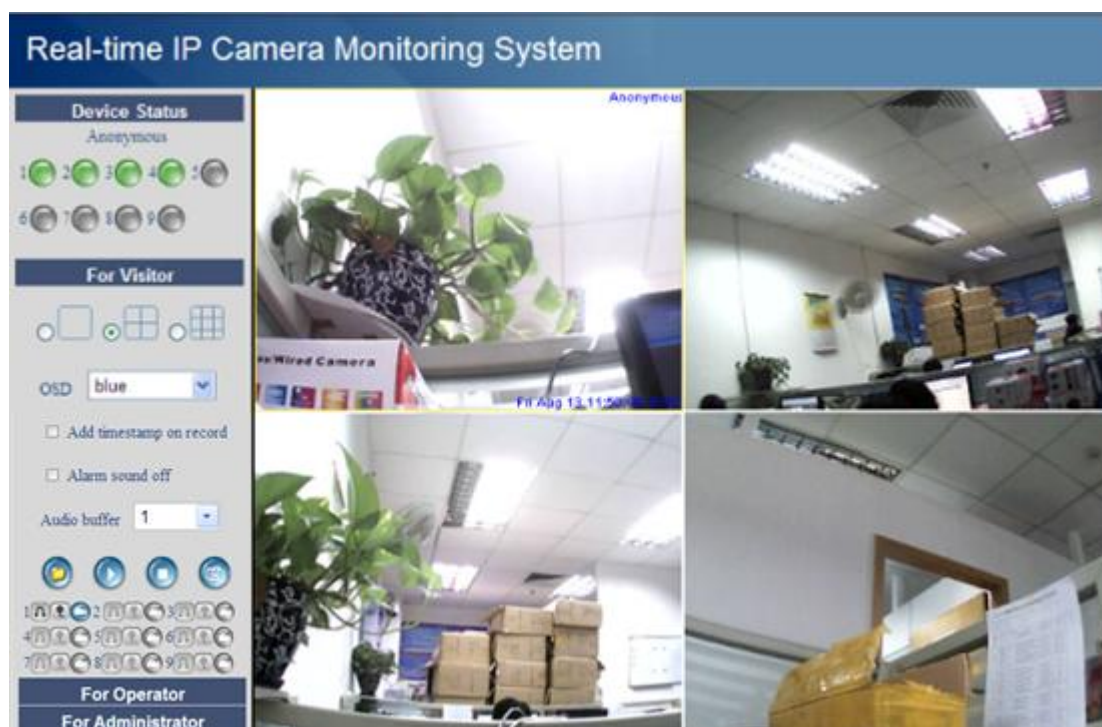


Figure 3.6

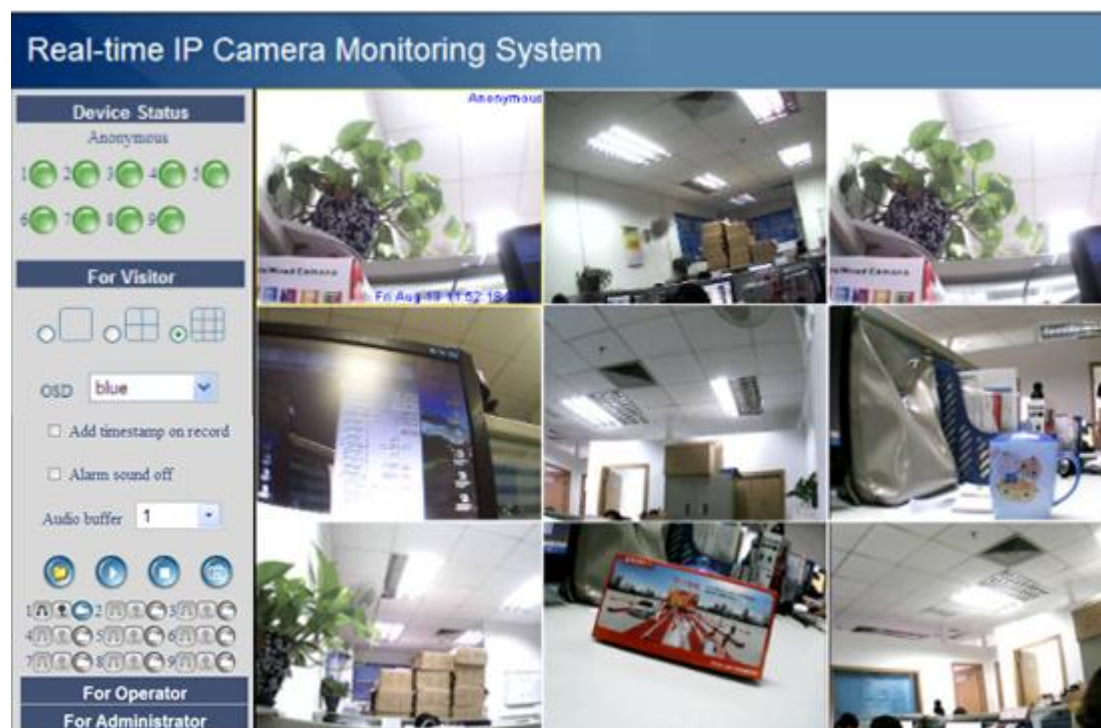


Figure 3.7

3.4.2 Add cameras in WAN

If you want to view all cameras via the internet(remote computer), you will need to add them using DDNS domain name. Firstly, make sure all of the cameras you added can be accessed through the internet. (Read **How to configure DDNS settings in Quick Installation Guide**) Login to the first camera using a DDNS domain name and port.

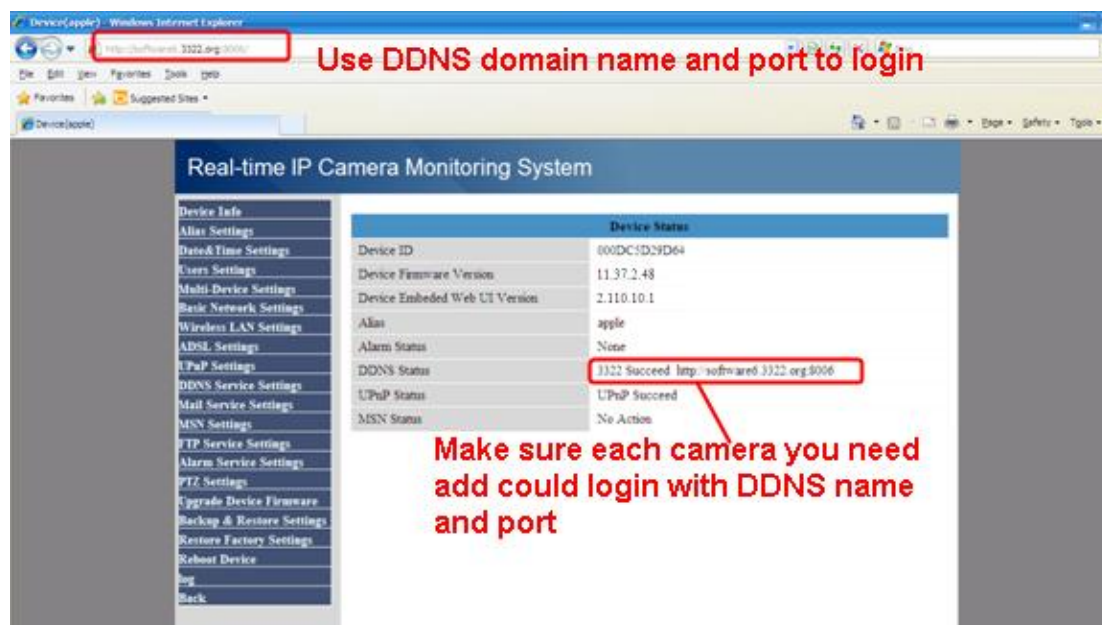


Figure 3.8

If you have several cameras, you can use the same DDNS domain name; you only need to set a different port number for each camera.

Click **Multi-Device Settings**. Choose **The 2nd Device**. Fill in the 2nd camera's name, DDNS domain name, port number. Enter user name and password and then choose Add. (Figure 3.9)

NOTE: Here the Host must be entered as the second camera's DDNS domain name, not its LAN IP.

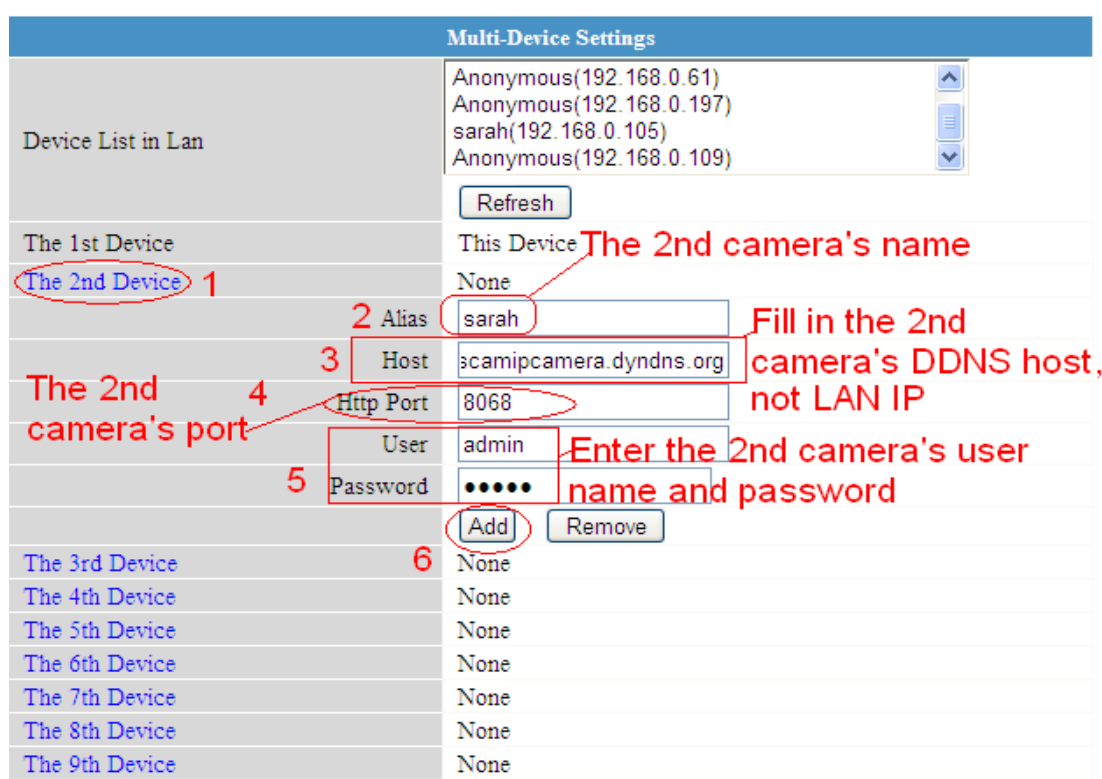


Figure 3.9

Add the other cameras in the same way. Click **Submit** to save.

Multi-Device Settings	
Device List in Lan	Anonymous(192.168.0.109) Anonymous(192.168.0.60) sarah(192.168.0.105) Anonymous(192.168.0.61) <input type="button" value="Refresh"/>
The 1st Device	This Device
The 2nd Device	sarah(camipcamera.dvndns.org)
The 3rd Device	IPcam(ipcamerademo.3322.org)
The 4th Device	Anonymous(ipcamera.dvndns.org)
The 5th Device	None
The 6th Device	None
The 7th Device	None
The 8th Device	None
The 9th Device	None
Attention: If you want to access the device from internet, be sure the host and port that you set can be accessed from internet. <input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Click Submit after finishing all the settings

Figure 3.10

Return to video window. You will see all of the cameras accessible through the internet. When you are away from home, you can use the first camera's DDNS domain name and port to view all the cameras via internet.

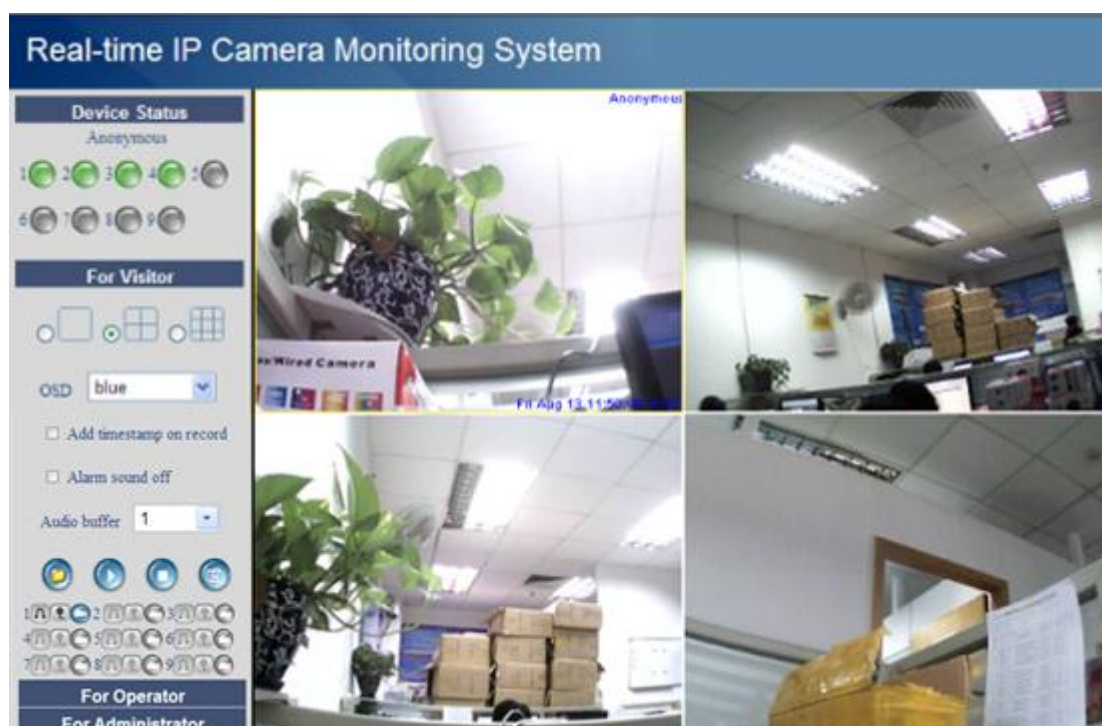


Figure 3.11

3.5 Basic Network Settings

If you want to set a static IP for the camera, select **Basic Network Settings**. Keep the camera in the same subnet of your router or computer.

Basic Network Settings	
Obtain IP from DHCP Server	<input type="checkbox"/>
IP Addr	192.168.0.109
Subnet Mask	255.255.255.0
Gateway	192.168.0.1
DNS Server	192.168.0.1
Http Port	8100
Network Lamp	<input checked="" type="checkbox"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Figure 3.12

Changing settings here is the same as using the IP Camera Tool. (Figure 2.5)

It is recommended that you use the subnet mask, gateway and DNS server from your locally attached PC. If you don't know the subnet mask, gateway and DNS server, you can check your computer's local area connection as follows:

Control Panel→Network Connections→Local Area Connections → Choose Support→Details.

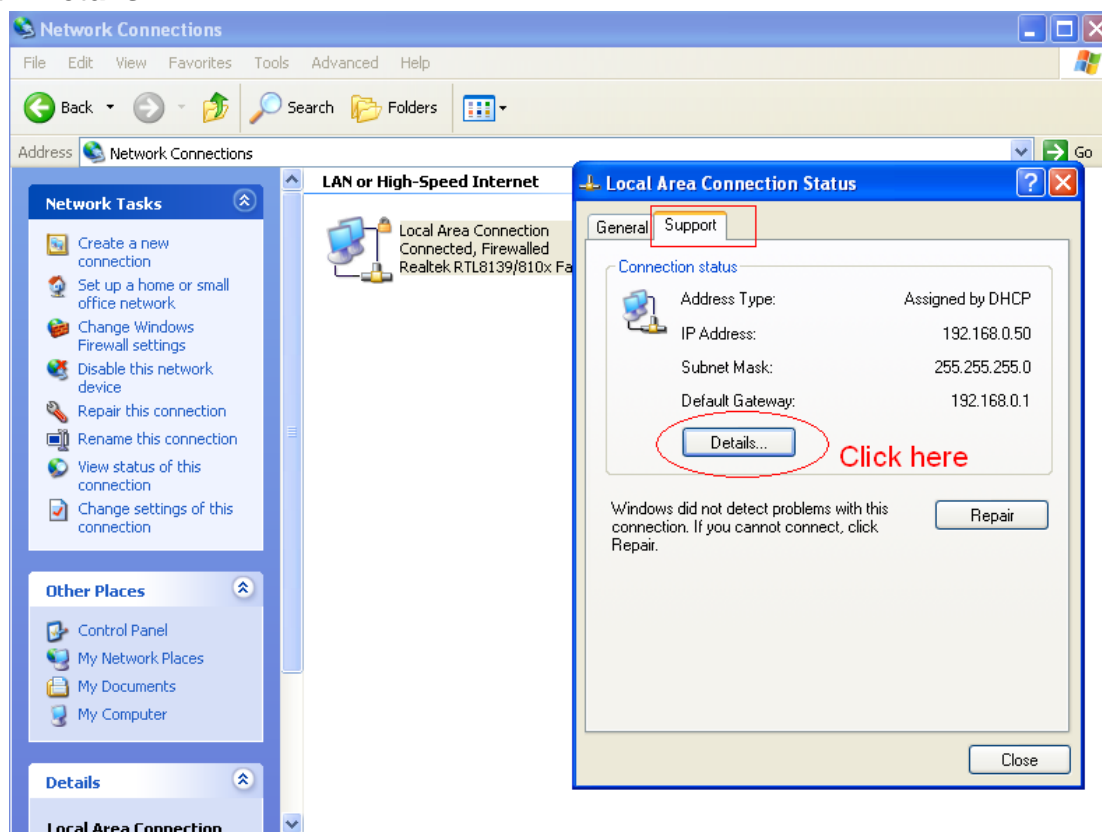


Figure 3.13

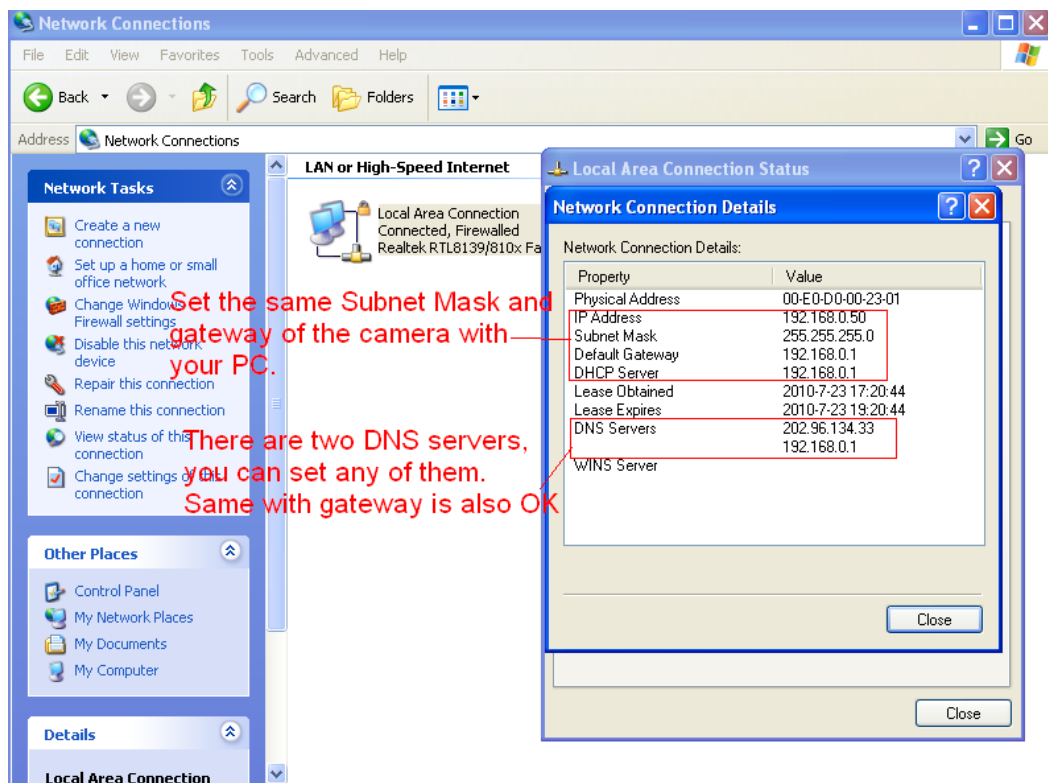


Figure 3.14

If you don't know the DNS server, you can use the same settings as the Default Gateway.

3.6 Wireless LAN Settings

Please view **How to set Wireless LAN Settings** in **Quick Installation Guide**.

3.7 ADSL Settings

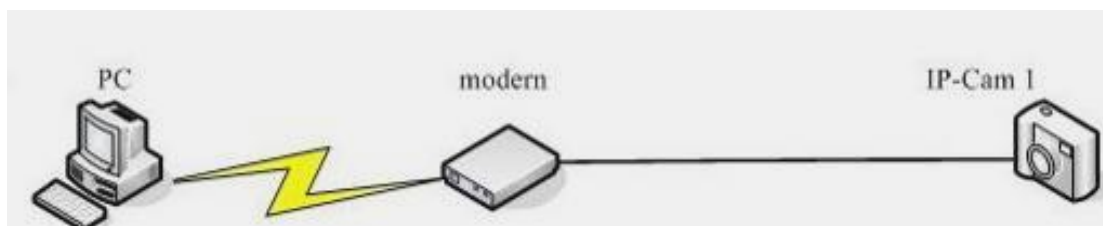


Figure 3.15


When connected to the Internet through ADSL directly, you can enter the ADSL username and password obtained from your ISP.

ADSL Settings	
Using ADSL Dialup	<input checked="" type="checkbox"/>
ADSL User	<input type="text" value="SZ10753952765089"/>
ADSL Password	<input type="password" value="....."/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Figure 3.16

3.8 UPnP Settings

Choose **Using UPnP to MAP Port** and then click **Submit**.

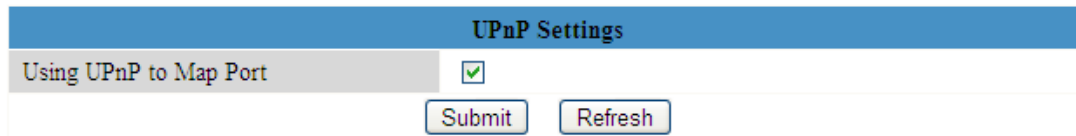

UPnP Settings	
Using UPnP to Map Port	<input checked="" type="checkbox"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Figure 3.17


The camera's software will be configured for port forwarding. There may be issues with your routers security settings, and sometimes may error We recommend you configure port forwarding manually on your router.

3.9 DDNS Service Settings

Please view the information in **Quick Installation Guide** about **How to set DDNS Service Settings**.

3.10 Mail Service Settings

If you want the camera to send emails when motion has been detected, **Mail Service Settings** will need to be configured.

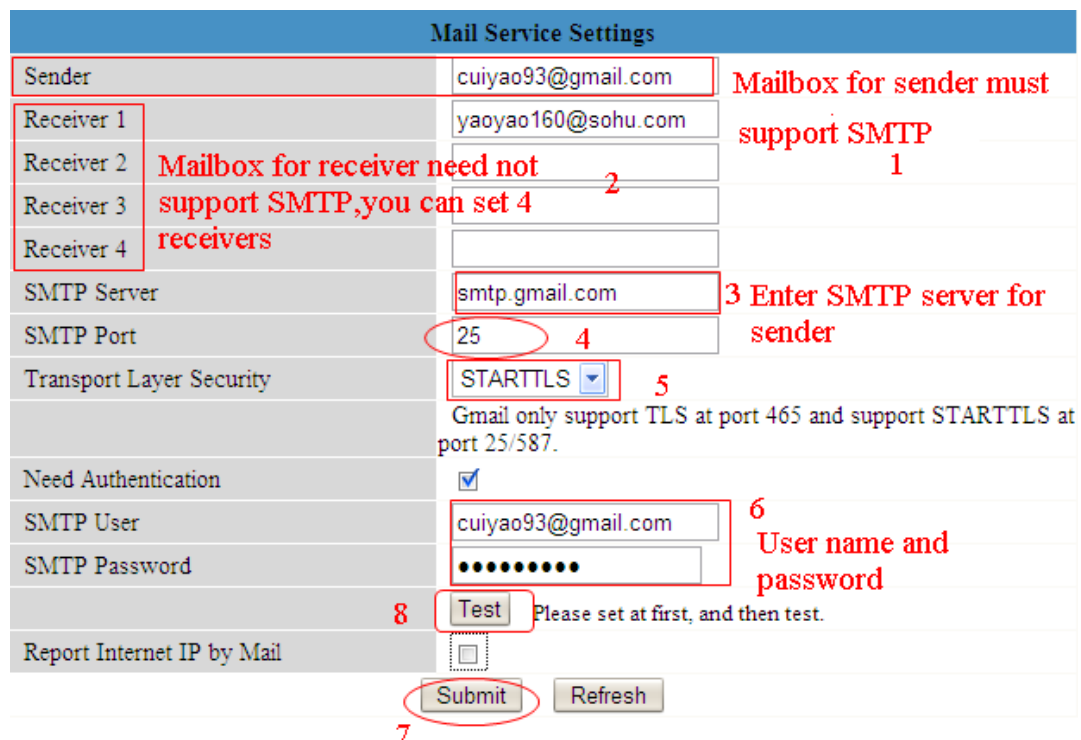

Mail Service Settings	
Sender	cuiyao93@gmail.com
Receiver 1	yaoyao160@sohu.com
Receiver 2	
Receiver 3	
Receiver 4	
SMTP Server	smtp.gmail.com
SMTP Port	25
Transport Layer Security	STARTTLS
Need Authentication	<input checked="" type="checkbox"/>
SMTP User	cuiyao93@gmail.com
SMTP Password	••••••••
	<input type="button" value="Test"/> Please set at first, and then test.
Report Internet IP by Mail	<input type="checkbox"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Figure 3.18

Make sure your mailbox for sender supports SMTP. Four recipients can be added to receive

images. **SMTP port** is usually set as 25. Some SMTP servers have their own port, such as 587 or 465 and Transport Layer Security usually is None. If you use Gmail, Transport Layer Security must be set to TLS or STARTTLS and SMTP Port must be set to 465 or 25 or 587, which port you choose should be decided by which Transport Layer Security you select.

NOTE: Click **Submit** first before choosing **Test**.

Click **Test** to see if SMTP has been successfully configured.

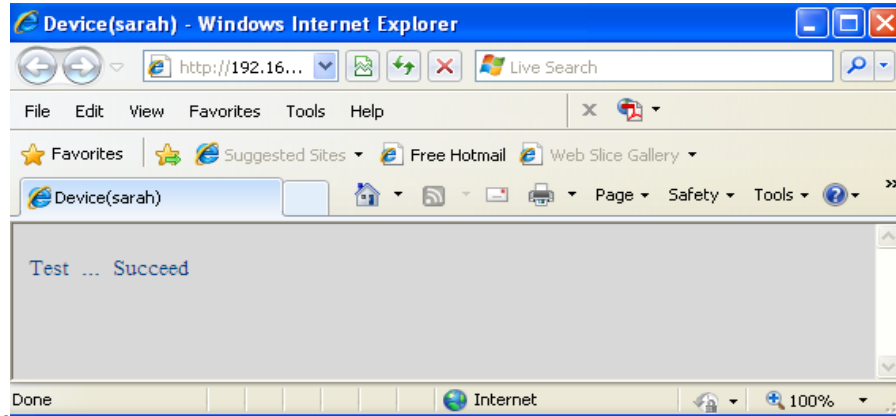


Figure 3.19

If the test fails with one of the following errors after clicking **Test**, **verify** that the information you entered is correct and again select **Test**.

- 1) Cannot connect to the server
- 2) Network Error. Please try later
- 3) Server Error
- 4) Incorrect user or password
- 5) The sender is denied by the server. Maybe the server need to authenticate the user, please check it and try again
- 6) The receiver is denied by the server. Maybe because of the anti-spam privacy of the server
- 7) The message is denied by the server. Maybe because of the anti-spam privacy of the server
- 8) The server does not support the authentication mode used by the device

Report Internet IP by Mail—If selected, you will receive emails which contains internet IP information such as When the camera is powered or the Internet IP has changed. (For example: IPCAM's url is http://119.123.207.96:8068). Make sure the port is mapped to the router correctly.

3.11 MSN Setting

If you forget the domain name of the camera and you want to access the camera remotely, you must configure MSN.

Acquire an MSN ID for the IPCAM first, then follow the instructions as per Figure 3.20a.

MSN Settings

User: sanshao27@hotmail.com

Password: ••••••

MSN Friends List:

- sanshao18@hotmail.com
-
-
-
-
-
-
-
-
-

Submit Refresh

Fill in the user and password of the MSN ID you applied for the camera

MSN in this list can chat with camera, you can fill 10 MSN friends

Click Submit after finishing all the settings

Figure 3.20a

Go to the “Device Info” screen and verify the MSN settings are correct.

Real-time IP Camera Monitoring System

Device Status

Device ID	000DC5D5FE9B
Device Firmware Version	11.37.2.48
Device Embedded Web UI Version	2.110.10.1
Alias	apple
Alarm Status	None
DDNS Status	No Action
UPnP Status	No Action
MSN Status	Succeed

Device Status

- Device Status
- Alias Settings
- Date & Time Settings
- Users Settings
- Multi-Device Settings
- Basic Network Settings
- Wireless LAN Settings
- ADSL Settings
- UPnP Settings
- DDNS Service Settings
- Mail Service Settings
- MSN Settings
- FTP Service Settings
- Alarm Service Settings
- PTZ Settings
- Upgrade Device Firmware
- Backup & Restore Settings
- Restore Factory Settings
- Reboot Device
- Log
- Back

Figure 3.20b

The one who in MSN Friends list login MSN, and then he can chat with camera .For example: “sanshao18”(look Figure 3.20a, it is contained in the MSN Friends List) login MSN, double click the icon of “ sanshao27 “(it is the MSN ID you applied for camera ,Figure3.20a) ,he or she can chat with IPCAM (Figure 3.21).

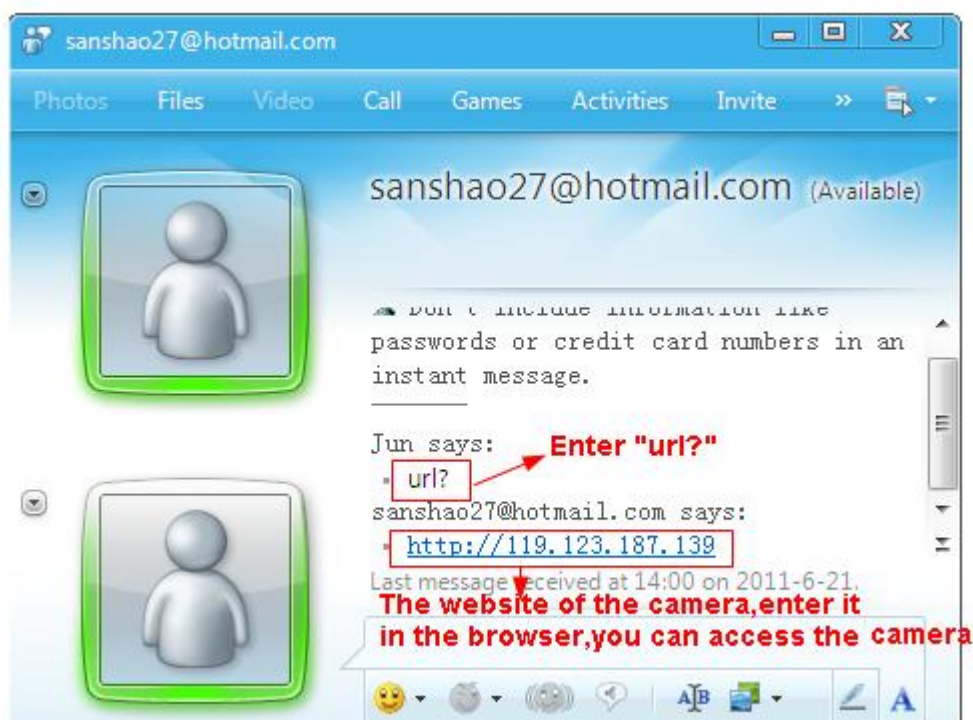


Figure 3.21

So, add your MSN ID to the MSN Friend List, you can then chat with the camera and get the access address and then login to the camera.

Note: When you login to the camera using the IP Camera Tool, you can't login to the camera using the MSN ID of camera at the same time.

3.12 FTP Service Settings

If you want to upload images to your FTP server, you can set **FTP Service Settings**.

FTP Service Settings	
FTP Server	192.168.0.50
FTP Port	21
FTP User	sarah
FTP Password	•••••
FTP Upload Folder	/
FTP Mode	PORT
	Test Please set at first, and then test.
Upload Image Now	<input checked="" type="checkbox"/>
Upload Interval (Seconds)	30
Enable Set Filename	<input checked="" type="checkbox"/>
Filename	test
	Submit Refresh

Please click submit before test

Figure 3.22

FTP Service Settings	
FTP Server	<input type="text" value="ftp.mgenseal.com"/>
FTP Port	<input type="text" value="21"/>
FTP User	<input type="text" value="deotest@mgenseal.com"/>
FTP Password	<input type="password" value="•••••"/>
FTP Upload Folder	<input type="text" value="/"/>
FTP Mode	<input type="button" value="PORT"/> <input type="button" value="Test"/> Please set at first, and then test.
Upload Image Now	<input checked="" type="checkbox"/>
Upload Interval (Seconds)	<input type="text" value="30"/>
Enable Set Filename	<input checked="" type="checkbox"/>
Filename	<input type="text" value="test"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Figure 3.23

FTP server: If your FTP server is located on the LAN, you can set as Figure 3.22.

If you have an FTP server which you can access on the internet, you can set as Figure 3.23.

FTP Port: Usually the port is 21.

FTP Upload Folder: Make sure that the folder you plan to store images exists as the camera can't create the folder itself. Also, the folder must be read/writable.

FTP Mode: The camera supports standard (POST) mode and passive (PASV) mode

Upload Image Now: This option will upload images continuously when you enable the checkbox

Enable Set Filename: When you enable this option the uploaded image will be named according to the filename you enter. The next image will overwrite the filename of the previous image. Hence there will only be one image, the last uploaded.

Filename: See the above option. **Note:** You cannot change the name of the alarm image.

Upload Interval refers to the time between the current image and the next image being uploaded.

Click **Submit** to save these settings. Click **Test**, the following screen displays if successful.

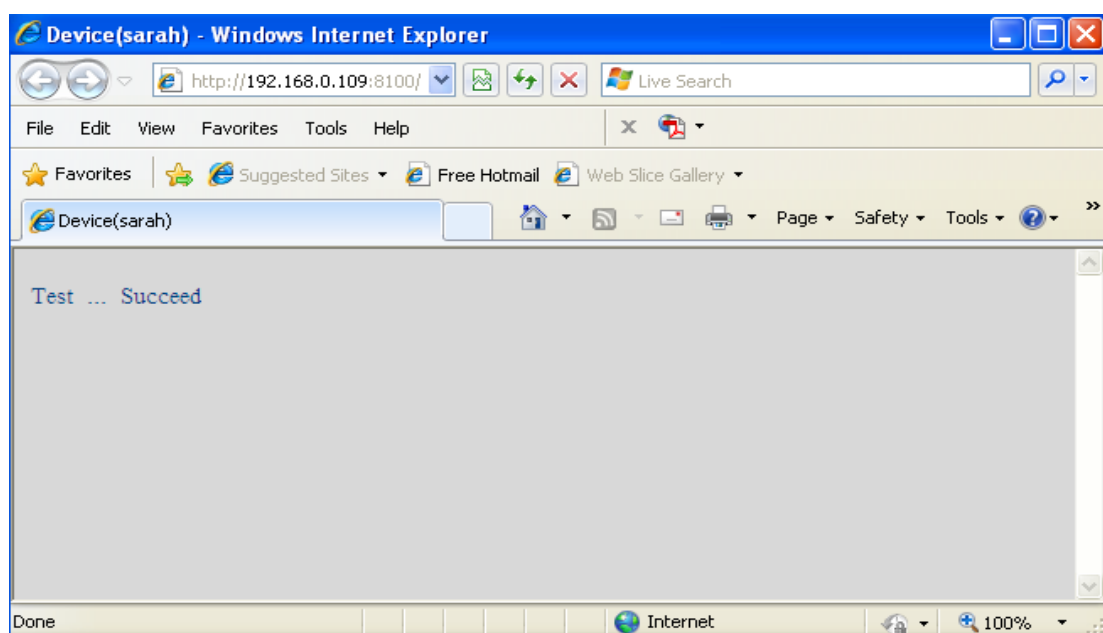


Figure 3.24

The following errors may occur:

- 1) Can not connect to the server. Check if the FTP Server is correct.
- 2) Network Error. Please try later.
- 3) Server Error.
- 4) Incorrect user or password. Check the username and password.
- 5) Cannot access the folder. Verify the folder exists and your account is authorized
- 6) Error in PASV mode. Verify the server supports PASV mode.
- 7) Error in PORT mode. PASV mode should be selected if the device is behind a NAT.
- 8) Cannot upload file. Verify your account is authorized

If an error occurs check the parameters you entered are correct. The filename format of the image is similar to 00606E8C1930(sarah)_0_20100728114350_25.jpg

Check if your FTP server supports this file name format.

3.13 Alarm Service Settings

If you enable **Motion Detect Armed**, it will send email alerts and upload images when motion has been detected.

Alarm Service Settings	
Motion Detect Armed	<input checked="" type="checkbox"/>
Motion Detect Sensibility	10
Motion Compensation	<input checked="" type="checkbox"/>
Send Mail on Alarm	<input type="checkbox"/>
Upload Image on Alarm	<input type="checkbox"/>
Scheduler	<input type="checkbox"/>

Submit Refresh

Figure 3.25

Device Status	
Device ID	000DC5D5FE9B
Device Firmware Version	11.37.2.48
Device Embedded Web UI Version	2.110.10.1
Alias	apple
Alarm Status	Motion Detect Alarm
DDNS Status	No Action
UPnP Status	No Action
MSN Status	No Action

Motion trigger

Figure 3.26

If motion is detected after you enable **Motion Detect Armed**, the Alarm Status will turn to Motion Detect Alarm.

There are five alarm indicators:

- 1) The light turns red when motion is detected.



Figure 3.27

- 2) A beep sound when the light turns red.
- 3) The camera will record automatically for one minute after motion is detected. You can find the recording file in the folder which you set previously. (Figure 3.3)
- 4) Camera will send emails when motion is activated.

If you want to receive images when motion is detected, you must set **Mail Service Settings** first. (Figure 3.18) Then set motion alarm as follows:

Alarm Service Settings	
Motion Detect Armed	<input checked="" type="checkbox"/>
Motion Detect Sensibility	10 ▼
Motion Compensation	<input type="checkbox"/>
Send Mail on Alarm	<input checked="" type="checkbox"/> select checkbox
Upload Image on Alarm	<input type="checkbox"/>
Scheduler	<input type="checkbox"/>
<input type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Figure 3.28

If you want to specify when the camera sends mails in a specific time when motion is detected, you can choose Scheduler and set the time range for motion alarm. (Figure 3.30)

- 5) Upload images via FTP server when motion trigger.

To upload images to an FTP server when motion is detected, you must set **FTP Service Settings** first and then set motion alarm as pictured below (Figure 3.29)

Alarm Service Settings	
Motion Detect Armed	<input checked="" type="checkbox"/>
Motion Detect Sensibility	10 ▼
Motion Compensation	<input type="checkbox"/>
Send Mail on Alarm	<input type="checkbox"/>
Upload Image on Alarm	<input checked="" type="checkbox"/> Select this option
Upload Interval (Seconds)	2 Set an interval for images to upload
Scheduler	<input type="checkbox"/>
<input checked="" type="button" value="Submit"/> <input type="button" value="Refresh"/>	

Figure 3.29

There are two ways to set the alarm.

- 1) Alarm at any time when motion is detected.

Don't select **Scheduler**. Click Submit and the camera will alarm at any time when motion is

detected.

Another method: select Scheduler, and click “set All”, you will see all time boxes turn blue as in the following picture. Click Submit and the camera will alarm at any time when motion is detected.

Alarm Service Settings																								
Motion Detect Armed	<input checked="" type="checkbox"/>																							
Motion Detect Sensibility	10																							
Motion Compensation	<input type="checkbox"/>																							
Send Mail on Alarm	<input type="checkbox"/>																							
Upload Image on Alarm	<input type="checkbox"/>																							
Scheduler	<input checked="" type="checkbox"/>																							
												<div>set All</div> <div>clear All</div>												
Set	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Clear	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Sun																								
Mon																								
Tue																								
Wed																								
Thu																								
Fri																								
Sat																								
												<div>Submit</div> <div>Refresh</div>												

Figure 3.30

2) Specify an alarm schedule.

If you want the camera to alarm during set times select **Scheduler** and set time range.

If you want to select one serial area, you can click any number between 00 and 23 on the first row, the corresponding column will be selected and it will turn blue. For example, click the number “06” on the first row, you can see the column turn blue. That means the camera will alarm when motion is detected between 6 and 7 o’clock every day. Click the number “06” on the second row, you can cancel the corresponding column you set. And it will turn grey.

Alarm Service Settings	
Motion Detect Armed	<input checked="" type="checkbox"/>
Motion Detect Sensibility	10
Motion Compensation	<input type="checkbox"/>
Send Mail on Alarm	<input type="checkbox"/>
Upload Image on Alarm	<input type="checkbox"/>
Scheduler	<input checked="" type="checkbox"/>

Set	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Clear	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Sun																								
Mon																								
Tue																								
Wed																								
Thu																								
Fri																								
Sat																								

Figure 3.31

If you want to select discrete area, you click the left button on the box of time range. It will turn blue. If you want to delete it, just click the left button and it will turn grey.

Alarm Service Settings	
Motion Detect Armed	<input checked="" type="checkbox"/>
Motion Detect Sensibility	10
Motion Compensation	<input type="checkbox"/>
Send Mail on Alarm	<input type="checkbox"/>
Upload Image on Alarm	<input type="checkbox"/>
Scheduler	<input checked="" type="checkbox"/>

Set	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Clear	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Sun																								
Mon																								
Tue																								
Wed																								
Thu																								
Fri																								
Sat																								

Figure 3.32

If you want the camera alarm most of the time, you can select Set All first and then click left button on the box you don't want the camera to alarm even when the motion is detected. The box will turn grey. Click Submit to take effect.

Alarm Service Settings	
Motion Detect Armed	<input checked="" type="checkbox"/>
Motion Detect Sensibility	10
Motion Compensation	<input type="checkbox"/>
Send Mail on Alarm	<input type="checkbox"/>
Upload Image on Alarm	<input type="checkbox"/>
Scheduler	<input checked="" type="checkbox"/>

Set	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Clear	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Sun																								
Mon																								
Tue																								
Wed																								
Thu																								
Fri																								
Sat																								

Figure 3.33

3.14 PTZ Settings

You can set pan/tilt speed. Normally, PT speed is 3. The larger the setting number, the lower speed. Don't enable the checkbox "disable preset" if you want to use the function of preset, it will be effective after you reboot device.

PTZ Settings	
disable preset	<input checked="" type="checkbox"/>
Go center on boot	<input checked="" type="checkbox"/>
PT speed	3
Upward patrol speed	3
Downward patrol speed	3
Leftward patrol speed	3
Rightward patrol speed	3
patrol rounds horizontal	4
patrol rounds vertical	5

Figure 3.34

Patrol rounds horizontal: Set the round between 1 and 10, then click Submit. Back to "For Operator". Click the Horizon patrol button, the camera will patrol the rounds horizontally you set and then stop if you don't click Stop horizon patrol button. For example, you set 4 for the patrol rounds. Click submit and back to For Operator. Click the Horizon patrol button and do not click the Stop horizon patrol button, the camera will patrol 4 rounds and then stop automatically.

Patrol rounds vertical: Set the round between 1 and 10, then click submit. Back to "For

Operator". Click the Vertical patrol button, the camera will patrol the rounds vertically you set and then stop if you don't click Stop vertical patrol button.

Note: Patrol rounds horizontal/vertical has no relation with the rotation rounds that camera reboots.

3.15 Upgrade Device Firmware

When you upgrade the camera, please upgrade system firmware first and then upgrade the Web UI.

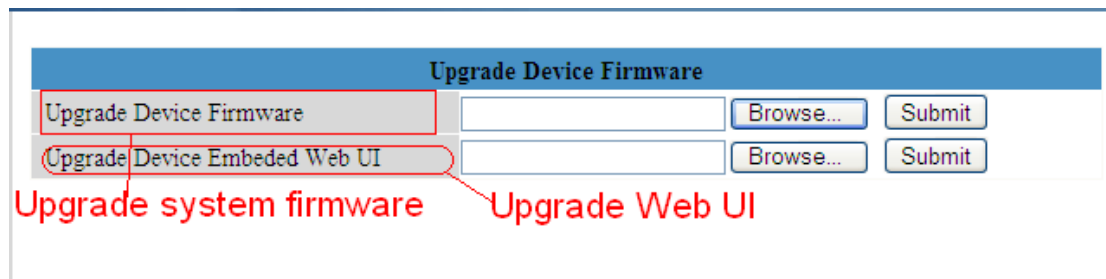


Figure 3.35

Click **Browse**, choose the correct bin file and then click **Submit** to upgrade.

Don't shut down the power during upgrade until the IP camera tool finds the camera again.

3.16 Backup & Restore Settings

Click **Submit** to save all the parameters you have set. These parameters will be stored in a bin file for future use. The bin file can be reloaded to restore the parameters that were set.

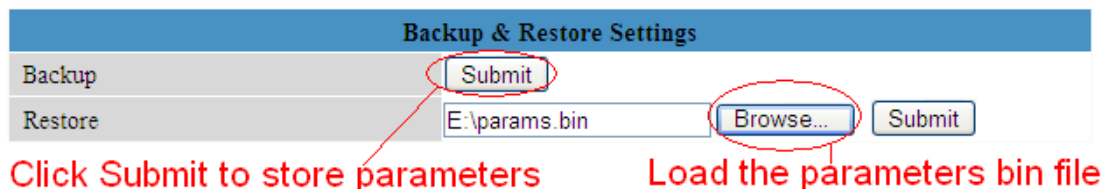


Figure 3.36

3.17 Restore Factory Settings

All parameters will return to factory settings if selected.

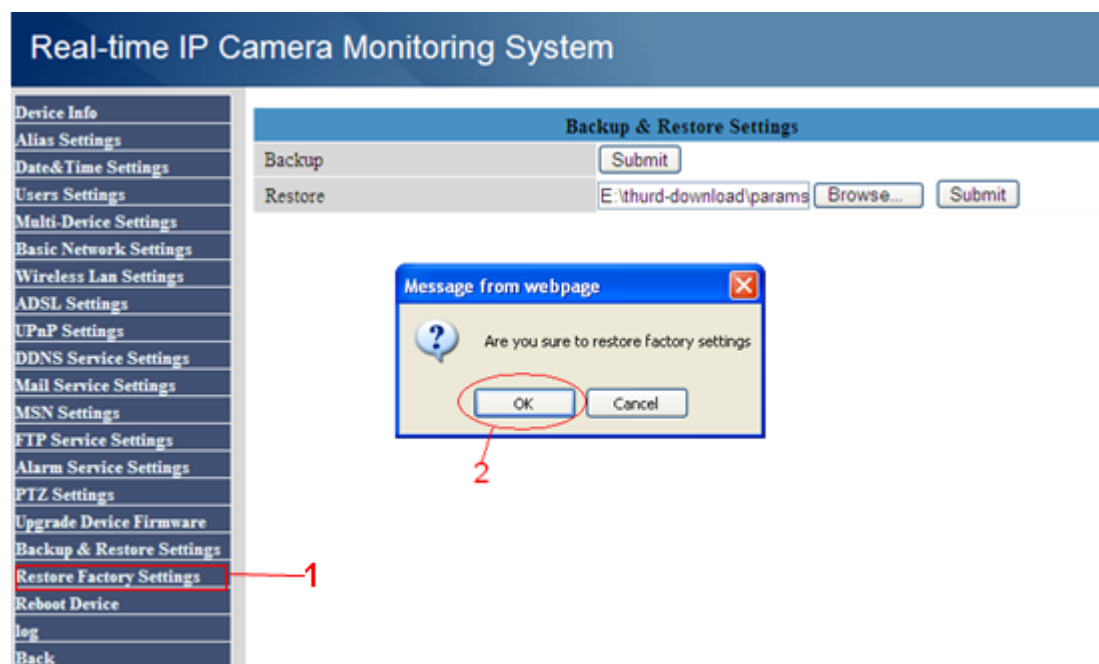


Figure 3.37

3.18 Reboot Device

Click **Reboot Device** to reboot the camera. This is similar to unplugging the power to the camera.

3.19 Log

The log record shows who accessed the camera and when. (Figure 3.38).

log					
Fri, 2010-07-30 09:56:58	admin	192.168.0.26	access		
Fri, 2010-07-30 10:49:04	admin	192.168.0.50	access		
Fri, 2010-07-30 14:17:01	admin	192.168.0.50	access		

Figure 3.38

3.20 Back

This will take you back to the video window.

4 APPENDIX

4.1 Frequently Asked Questions

NOTE: Always verify network connections are working by checking the status of the indicators on the network server, hub and network card.

4.1.1 I have forgotten the administrator username and/or password

To reset the administrator username and password, press and hold down the RESET BUTTON for 15 seconds. Upon releasing the reset button, the username and password will return to the factory default administrator username and password. Please power on the camera before reset

Default administrator username: **admin**

Default administrator password: No password

4.1.2 Subnet doesn't match, dbclick to change

If the IP Camera Tool shows the error "Subnet doesn't match, dbclick to change!", select **Obtain IP from DHCP server**. (Figure 2.4)

If this error still exists after obtaining an IP from the DHCP server, check the local area connection of your computer and verify the subnet and gateway of the camera which should be the same subnet of your computer. (Figure 2.5)

4.1.3 No Pictures Problems

Video streaming is managed by the ActiveX controller. If the ActiveX controller isn't installed correctly you will see no video image. There are two ways to resolve this problem:

- 1) Reinstall "IP Camera Tool" and ActiveX controller (recommended). (Figure 2.10~Figure 2.12)
- 2) Download ActiveX controller and set the security setting of IE: IE browser→Tool→Internet Proper→Security→Custom Level→ActiveX control and Plug-ins. The first three options of front should be set to be "Enable", The ActiveX programs read by the computer will be stored. As follows:

Enable: Download unsigned ActiveX controls

Enable: Initialize and script ActiveX controls not marked as safe

Enable: Run ActiveX controls and plug-ins

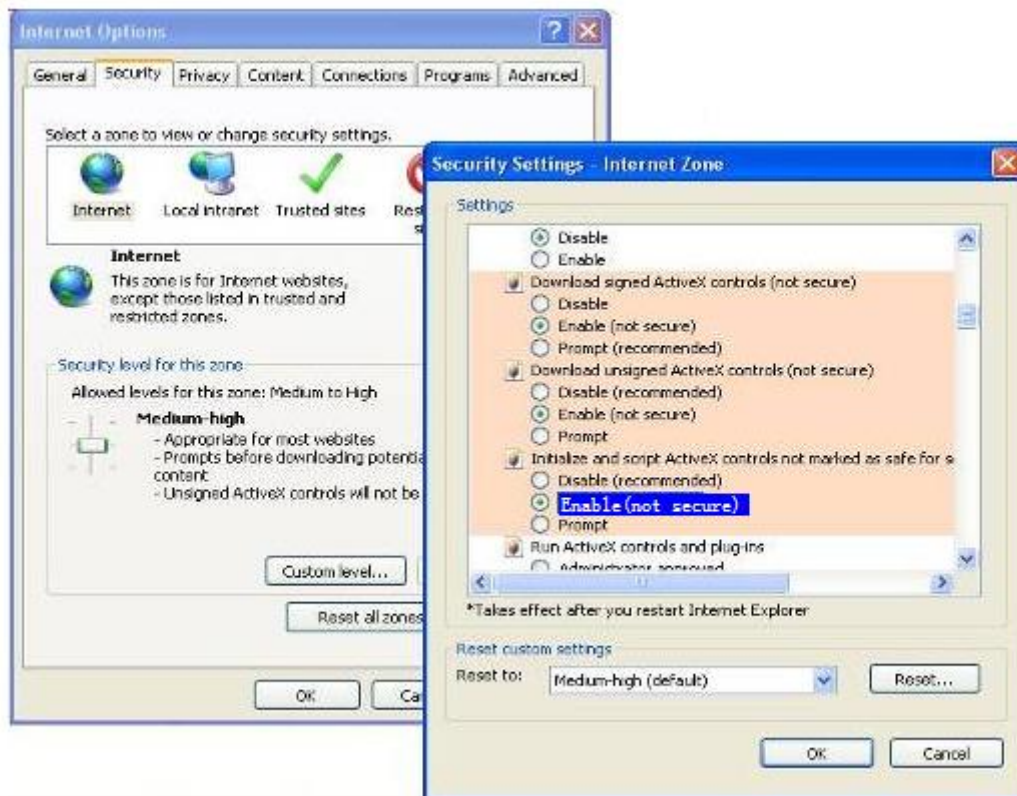



Figure 4.1

If you allow the ActiveX to run, but still can not see living video and a red cross in the centre of the video. There is a yellow light in the device status.  Not green. Pls select another port number. Don't use port 80, use port 85, 8005.etc.

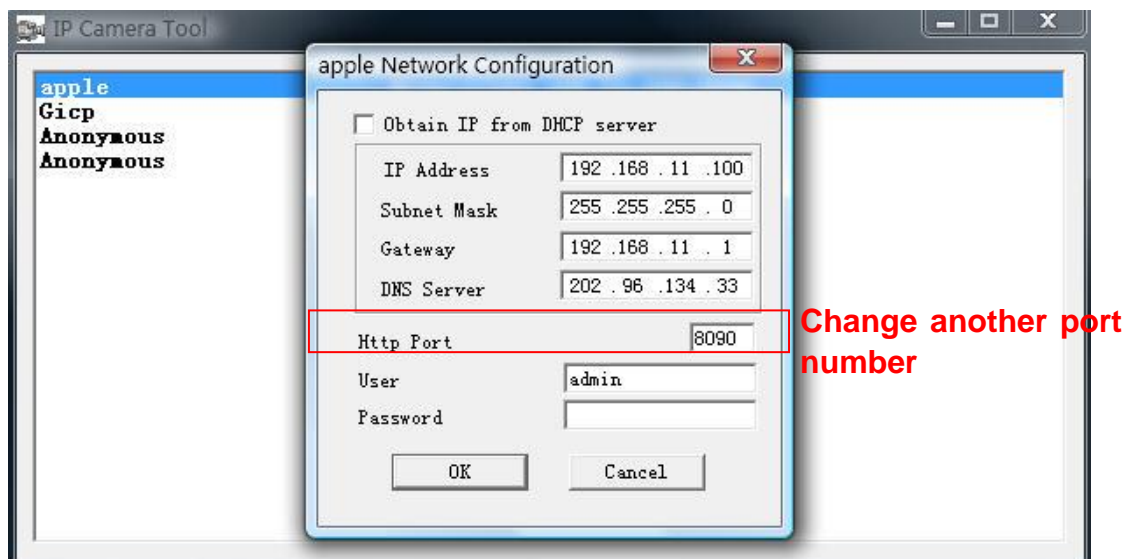


Figure 4.2

NOTE: Make sure that your firewall or anti-virus software does not block the camera or ActiveX. If you cannot see live video, try shutting down the firewall or anti-virus software and try again.

4.1.4 Can't access IP camera on internet

Possible reasons why camera is not accessible on the internet:

- 1) ActiveX controller is not installed correctly (see more details: Figure 2.10~Figure 2.12).
- 2) The port which the camera uses is blocked by a Firewall or Anti-virus software. Try changing to another port number. (Figure 4.2)
- 3) Port forwarding is not successful (see more details in **Quick Installation Guide—How to set DDNS Service settings**)

Double check these settings and make sure they are correct.

4.1.5 IP Camera Tool could not find camera's IP

Verify that the network cable is securely fastened to the camera.

Make sure that DHCP is enabled on your router, do not enable MAC address filter.

Make sure that the firewall or anti-virus software does not block the camera. You can add the camera as a trusted site on your firewall or anti-virus software.

4.1.6 UPnP always failed

UPnP only contains port forwarding in our recent software. Sometimes, it may be fail to do port forwarding automatically because of the firewall or anti-virus software. It may also be due to the router's security settings. We recommend manually configuring port forwarding the camera can be viewed on the internet.

4.1.7 Couldn't find the shortcut on the desktop after install IP camera tool

If you use Windows7 or Vista and the shortcut is missing after installing the IP camera tool, check the path of IP Camera program.

For example, if it was pointing to C:\Windows\System32\IPCamera.exe.

Please fix this by pointing the shortcut to the correct path

C:\Windows\SysWOW64\IPCamera.exe. After this you should be able to use the shortcut without any problems.

4.1.8 I can't change the record path

When you use Windows7 or Vista, you may be not able to change the record path because of the security settings of computer. Please add the camera as a trusted site to resolve this issue.

The steps are

IE browser→Tool→Internet Properties→Security→Trusted sites→Sites→Add

4.1.9 I can't find multi-device settings and record icon

Record and multi-device functionality are controlled by the ActiveX controller. These functions are not available in Firefox, Google Chrome and Safari.

4.1.10 Camera cannot connect using wireless

If your camera cannot connect wirelessly after you set the wireless settings, unplug / plug the power cable. (for more details: **Wireless LAN settings** in **Quick Installation Guide**)

Usually, camera can't connect wireless mainly because of incorrect settings.

Verify that the SSID is correct; use the same encryption for router and camera. Share key should not contain special characters, only word and number will be better. Disable MAC address filtering.

4.1.11 Can't see other cameras listed in multi-device when using remote

access

If you want to view all the cameras via the WAN, verify that each camera added in the multi-device settings can be accessed by using the DDNS name and port number. Use the DDNS domain name not the camera's LAN IP. (For more details see: How to add cameras in WAN)

4.1.12 Only see black screen or undefined characters when using remote

login

If you could access the login page remotely, this indicates that your DDNS settings are correct. If you are unable to see live video but only some undefined characters, this may be due to the internet speed issues or the camera using Wi-Fi.

4.2 Default Parameters

Default network Parameters

IP address: obtain dynamically

Subnet mask: 255.255.255.0

Gateway: obtain dynamically

DHCP: Disabled

DDNS: Disabled

Username and password

Default administrator username: **admin**

Default administrator password: No password

4.3 Specifications

ITEMS		HWEYE01x
Image Sensor	Image Sensor	High Definition Color CMOS Sensor
	Display Resolution	640 x 480 Pixels(300k Pixels)
	Lens	f: 3.6mm,F:2.4
	Mini. Illumination	0.5Lux
Lens	Lens Type	Glass Lens
	Viewing Angle	67 degree
	IR_CUT	Filter will switch automatically
Video	Image Compression	MJPEG
	Image Frame Rate	15fps(VGA),30fps(QVGA)
	Resolution	640 x 480(VGA), 320 x 240(QVGA)
	Flip Mirror Images	Vertical / Horizontal
	Light Frequency	50Hz, 60Hz or Outdoor
	Video Parameters	Brightness, Contrast
Audio	Input	Built-in Microphone
	Output	Built-in Speaker,with a audio jack
	Audio Compression	MJPEG
Communication	Ethernet	One 10/100Mbps RJ-45
	Supported Protocol	HTTP,FTP,TCP/IP,UDP,SMTP,DHCP,PPPoE,DDNS,UPnP,GP RS
	Wireless Standard	IEEE 802.11b/g/n
	Data Rate	802.11b: 11Mbps(Max.) 802.11g: 54Mbps(Max.) 802.11n: 150Mbps(Max.)
	Wireless Security	WEP & WPA & WPA2 Encryption
	Infrared Light	11 IR LEDs, Night visibility up to 8 meters
	Dimension	117(L) x114(W) x129mm(H)
	Gross Weight	785g
	Net Weight	323g
Power	Power Supply	DC 5V/2.0A (EU,US,AU adapter or other types optional)
	Power Consumption	5Watts (Max.)
Environment	Operate Temper.	0° ~ 55°C (32°F ~ 131°F)
	Operating Humidity	20% ~ 85% non-condensing
	Storage Temper.	-10°C ~ 60° (14°F ~ 140°F)
	Storage Humidity	0% ~ 90% non-condensing
PC Requirements	CPU	2.0GHZ or above
	Memory Size	256MB or above
	Display Card	64M or above
	Supported OS	Microsoft Windows 2000/XP/Vista/Windows7-32bit/Windows7-64bit/mac
	Browser	IE 6.0, IE7.0, IE8.0,IE9.0, Firefox2.0,Firefox3.0, Google Chrome, Safari or other standard browsers
Certification	CE,FCC	

5 OBTAINING TECHNICAL SUPPORT

While we hope your experience with the IPCAM network camera is enjoyable and easy to use, you may experience some issues or have questions that this User Guide has not answered.

If you have any problem with your HomeWizard IP camera, please first contact your HomeWizard reseller for solving the problems. If our reseller cannot provide service, please contact our service department: support@homewizard.eu

